

Radiation Belt Storm Probes Ion Composition Experiment (RBSPICE)

Science Operations Center (SOC) RBSPICE Science Data Handbook

Revision: c

Written by
Jerry W. Manweiler, Ph.D.
and
Heather Mull

August 18, 2015

Lou Lanzerotti, RBSPICE Principal Investigator
Don Mitchell, RBSPICE Instrument Scientist
Jerry W. Manweiler, RBSPICE SOC Lead Engineer

Document Change Log

Date	Version Number	Reason for Change
September 18, 2013		Original Draft
January 29, 2014	Rev a	Added Field Name Descriptions Table for the Calibration Tables
February 28, 2014	Rev b	Revised L3 pitch angle quality flags
August 18, 2015	Rev c	Added section for Pitch Angles and Pressures (PAP), and Table of Acronym Definitions

RBSPICE Data Handbook

1	Introduction	5
1.1	Document Purpose	5
1.2	Document Scope	5
1.3	Applicable Documentation.....	5
	<i>RBSPICE Instrument Paper</i>	5
2	Links to Data files, calibration tables and software	5
2.1	RBSPICE A and B data files.....	5
2.2	RBSPICE A and B calibration tables	5
2.3	Software required and recommended to use RBSPICE data.....	6
3	RBSPICE SOC Archive Data Products.....	7
3.1	RBSPICE Data Categories	7
3.2	RBSPICE Data Products Specification	7
3.3	RBSPICE Data Product Production Specifications.....	8
3.4	RBSPICE Data Products and related Instrument Data Modes	9
3.5	RBSPICE Data Product Production Steps (High Level Overview)	11
3.6	RBSPICE Data Product Production Steps (Detailed Processing Algorithms)	12
3.6.1	Level 0 Processing Algorithms	12
3.6.2	Level 1 Processing Algorithms	17
3.6.3	Level 2 Processing Algorithms	20
3.6.4	Level 3 Processing Algorithms	22
4	RBSPICE SOC Data Repository Directory Structure	26
4.1	Van Allen Probes MOC Data Directory structures	26
4.2	RBSP Spacecraft Data Organization.....	26
4.3	EMFSIS Data Organization	27
4.4	RBSPICE Data Organization	27
4.5	Product Directory Naming	28
5	Production Filename Convention.....	29
5.1	RBSP CDF Filenames.....	29
5.2	RBSPICE Specific File Name Conventions.....	31
5.3	RBSPICE Data Release Plans	32
5.3.1	Publicly Accessible RBSPICE Data.....	32

- 5.3.2 Release of data to NSSDC archive..... 32
 - 5.3.3 Web Services Access 32
- 6 RBSPICE Data Product Field Descriptions 33
 - 6.1 RBSPICE Level 1 Product Field Descriptions..... 33
 - 6.2 RBSPICE Level 2 Product Field Descriptions..... 44
- 7 References 64

1 INTRODUCTION

1.1 DOCUMENT PURPOSE

This is the Data Analysis Handbook for the Van Allen Probes' Radiation Belt Storm Probes Ion Composition Experiment (RBSPICE). This handbook is intended to guide RBSPICE data users in locating, identifying and understanding the content of the RBSPICE data files maintained by the RBSPICE Science Operations Center (SOC). As data products are added or changed, or other changes are made to the system for storing and accessing the RBSPICE data, this document will be updated accordingly.

1.2 DOCUMENT SCOPE

This document contains lists, descriptions and/or explanations pertaining to the following RBSPICE data assets:

Data directory structure and file naming convention;

Data products produced and utilized by the RBSPICE SOC data processing system and data publication system;

Produced and published data products for the RBSPICE instrument aboard each Van Allen Probes satellite, A and B, which are available to the general public; and

Processes used to convert the data and generate data products according to specifications from Level 0 through Level 4.

Users who wish to work with either telemetry or commanding data or who have other questions not addressed in this document concerning data maintained by the RBSPICE SOC should contact RBSPICE SOC Lead Engineer Jerry W. Manweiler, Ph.D. at Manweiler@ftecs.com.

1.3 APPLICABLE DOCUMENTATION

Originally named the Radiation Belt Storm Probes (RBSP), the mission was re-named the Van Allen Probes, following successful launch and commissioning. For simplicity and continuity, the RBSP short-form has been retained for existing documentation, file naming, and data product identification purposes. The RBSPICE investigation including the RBSPICE Instrument SOC maintains compliance with requirements levied in all applicable mission control documents.

1.4 ACRONYM DEFINITIONS

[Insert table of data products, with acronyms, and explain what the data products are and how they are used. Maybe organize the table by protons, non-protons, ions, etc.]

RBSPICE Instrument Paper

One key document that every user of the RBSPICE data should read is the RBSPICE Instrument Paper. The abstract can be found at <http://link.springer.com/article/10.1007%2Fs11214-013-9965-x>, along with a link to the full paper.

2 LINKS TO DATA FILES, CALIBRATION TABLES AND SOFTWARE

2.1 RBSPICE A AND B DATA FILES

Publicly accessible data files for spacecraft A are found at <http://rbspicea.ftecs.com>.

Publicly accessible data files for spacecraft B are found at <http://rbspiceb.ftecs.com>.

2.2 RBSPICE A AND B CALIBRATION TABLES

Calibration Tables – Field Name Descriptions

SC	Name of spacecraft either RBSPA or RBSPB
ProductType	One of the product types listed in the beginning of the cal file
Telescope	Identifies which of the six telescopes the cal information corresponds
StartUTC	The starting time for this calibration record in UTC string format (CCYY-MM-DDTHH:MM:SS:hhh)
StartET	The starting time for this calibration record in Ephemeris Time using the J2000 epoch
StopUTC	The ending time for this calibration record in UTC string format (CCYY-MM-DDTHH:MM:SS:hhh)
StopET	The ending time for this calibration record in Ephemeris Time using the J2000 epoch
Species	The primary species for which this calibration record is responsive – note that this does not identify all species that this channel will detect but the species that it is designed to detect, some channels are responsive to multiple species and depending upon the situation the primary species differs from time to time. E.g. TOF _x PH products are generally responsive to protons but some of the channels are responsive to Oxygen or Helium although when those species are not present the channel will detect background proton rates
Channel	The energy channel number for this calibration record
E_Low	The bottom energy of the passband in MeV
E_High	The upper energy of the passband in MeV
E_Mid	The calculated midpoint energy of the passband in MeV. Note that this is not always the geometrical mean since some passbands are more sensitive to lower energies even though they allow for higher energy ranges
G_Small	The small pixel geometrical factor in cm ² *sr. See the RBSPICE Data Handbook for more information about pixel sizes
G_Large	The large pixel geometrical factor in cm ² *sr. See the RBSPICE Data Handbook for more information about pixel sizes
Eff	The efficiency of the energy channel.
Notes	Any specific notes about this energy channel.

Calibration tables for spacecraft A are found at http://rbspice.ftecs.com/RBSPICEA_Calibration.html.

Calibration tables for spacecraft B are found at http://rbspice.ftecs.com/RBSPICEB_Calibration.html.

2.3 SOFTWARE REQUIRED AND RECOMMENDED TO USE RBSPICE DATA

CDF Files

Access and use of the RBSPICE data requires the most recent version of NASA's common data format (CDF) software, CDF V3.6.0, which supports the CDF_TIME_TT2000 variable and properly handles the new leapsecond added on June 30, 2015. This software is available for download at <http://cdf.gsfc.nasa.gov>.

CSV Files

CSV files can be opened with PKZip, which can be found at this website: <http://www.pkware.com/software/pkzip>.

Data visualization

MIDL is used and recommended by the RBSPICE team to visualize RBSPICE data. This software is available for download at <http://sd-www.jhuapl.edu/rbspice/MIDL>.

3 RBSPICE SOC ARCHIVE DATA PRODUCTS

The RBSPICE SOC data system contains data products derived from other RBSP mission-related data sources, as well as that data which is produced by the RBSPICE SOC, both intermediary and final. Organizationally this can be viewed as a collection of data categories, data product specifications, and data production specifications. Each of the following sections provides details of these organizational perspectives on the RBSPICE data.

3.1 RBSPICE DATA CATEGORIES

Table 3-3-1 lists the various RBSPICE data categories representing the highest level perspective on the data that is to be contained by the RBSPICE SOC Data Repository system. These categories do not necessarily represent a directory structure, but do drive the final structure presented in Section 4.

Table 3-3-1 Top level list of RBSPICE Data Categories

Data Category	Data Source	Publication/Access Level
MOC Data Products – not instrument specific	MOC	RBSPICE team only
EMFISIS Mag Data Products	MOC/EMFISIS SOC	RBSPICE team only
RBSPICE Instrument Data (telemetry/Level 0)	MOC	RBSPICE team only
RBSPICE Level 1, 2, 3 Data	RBSPICE SOC	General Public
RBSPICE Level 3 PAP data	RBSPICE SOC	General Public
RBSPICE Level 4 Data – modeling data	RBSPICE Science Team	RBSP
RBSPICE Level 4 Data – results data	RBSPICE Science Team	General Public
RBSPICE Intermediate Data	RBSPICE SOC	RBSPICE SOC only

3.2 RBSPICE DATA PRODUCTS SPECIFICATION

Table 3-3-2 lists the collection of data products contained in the RBSPICE SOC Data Repository that are specific to the RBSPICE Instrument measurements, as well as any other data elements required to process and understand/interpret the RBSPICE data. The Level 0 data products are downloaded directly from the Mission Operations Center (MOC), stored locally within the RBSPICE SOC Data Repository, and used for production of the higher level data products. This table provides a high level characterization of the important variables defining the various data products and drives the final structure of the RBSPICE SOC Data Repository.

For a more complete discussion of each of the higher level data products and the controlling variables, see <http://link.springer.com/article/10.1007%2Fs11214-013-9965-x> for the abstract and a link to the full paper.

Table 3-3-2 RBSPICE SOC Data Products

Product	Species	Energy Bins	L0 Data Type	L1 Data Type	L2 Data Type	L3 Data Type	L4 Data Type
Ion Basic Rate	Ions	NA	Count	Rate			
Electron Basic Rate	Electrons	NA	Count	Rate			
Low Energy Resolution High Time Resolution Electron Species Rate ¹	Electrons	14	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiabatic,
High Energy Resolution Low Time Resolution Electron Species Rate ¹	Electrons	64	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiabatic,

Product	Species	Energy Bins	L0 Data Type	L1 Data Type	L2 Data Type	L3 Data Type	L4 Data Type
High Energy Resolution Low Time Resolution Ion Species Rate ¹	Ions	64	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiat,at,
High Energy Resolution Low Time Resolution TOFxPH Proton Rate	Protons	32	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiat,at,
TOFxE Proton Rate	Protons	14	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiat,at,
TOFxE non Proton Rate	Heavy Ions	28	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiat,at,
Low Energy Resolution High Time Resolution TOFxPH Proton Rate	Protons	10	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiat,at,
TOFxE Ion Species	Ions	64	Count	Spectra	Spectra Flux	PAD, Aggregates	PSD, 2nd, 3rd Adiat,at,
Space Weather Rates	All	NA	Count	Rate	Flux		
Ion Species Basic Rate	Ions	NA	Count	Rate			
Priority Events	NA	NA	Event				
Ion Energy Diagnostic Rate	Ions	NA	Count	Rate			
Ion Species Diagnostic Rate	Ions	NA	Count	Rate			
Raw Ion Species Events	Ions	NA	Event				
Raw Electron Energy Events	Electrons	NA	Event				
Raw Ion Energy Events	Ions	NA	Event				
Auxiliary Data	NA	NA	Aux				
Critical Housekeeping Data	NA	NA	HSK				
Magnetometer Data and Pointing Information			Mag			Pitch Angles	

1: Use of the term “species” in these products descriptions is misleading since these three data products utilize the energy collection mode of the RBSPICE instrument, rather than the species collection mode. See below for more details about which products use which instrument modes.

3.3 RBSPICE DATA PRODUCT PRODUCTION SPECIFICATIONS

Table 3-3-3 lists the various data products that exist within the RBSPICE SOC Data Repository and are either produced or used by the RBSPICE SOC Processing System and stored within the RBSPICE SOC Data Repository. This table provides the critical variables that drive the final storage solution including the expected requirements on the final data volume. These requirements drive not only the size of the file system but also characterize the performance of the database where the data resides for quick access and use by the publication system.

Table 3-3-3 RBSPICE SOC Data Product Production Specifications

Data Level	Product Title	Contents	Volume	Format	Latency	Frequency
------------	---------------	----------	--------	--------	---------	-----------

L0	Raw telemetry	Raw de-commutated telemetry received at RBSPICE-SOC	414 MB / day - TBR	Binary	from Receipt (T ₀)	daily
L1	Count Rates	Sorted, time-tagged, instrument separated cts/sec	750 MB / day - TBR	ISTP Compliant CDF & ASCII (CSV)	T ₀ + < 14 days	daily
L2	Calibrated Flux	Calibrated and corrected physical units	1200 MB / day - TBR	ISTP Compliant CDF & ASCII (CSV)	T ₀ + < 1 month	daily
L3	Pitch Angle and Moments	Pitch angle distributions, plasma moments	1500 MB / day - TBR	ISTP Compliant CDF & ASCII (CSV)	T ₀ + < 3 months*	daily
L4	Phase Space Density	PSD units, adiabatic invariants, mag coordinates	30 MB / day	ISTP Compliant CDF & ASCII (CSV)	T ₀ + < 1 year	daily

3.4 RBSPICE DATA PRODUCTS AND RELATED INSTRUMENT DATA MODES

RBSPICE Flight Software spin-based sectoring is used to break each spin into 36 sectors. The sectoring information is then used to drive the accumulation periods for each of the counting data products. Table 3-4 identifies the various data products collected by the RBSPICE instrument on each spacecraft. The accumulation time of each measurement is dependent upon the frequency strings shown in the table.

The Frequency column uses the following key phrases:

As needed	This product is only produced at certain times and is not a regular product
On Demand	This product is only produced at certain times and is not a regular product
On Demand	This product is like the “On Demand” but has a 1 record per second default frequency
Commandable	The frequency of this product is configurable
Every Second	A record is produced every second the instrument is on
Every Spin	A record is produced once per spin
S Sectors	A record is produced every S sectors; S is a configurable number in the flight software (fsw)
S*N1 Sectors	A record is produced every S*N1 sectors where S and N1 are configurable in the fsw
S*N1*N2	Accumulation occurs over multiple spins for every S*N1*N2 sectors where the actual
Sectors/Spins	number of Spins and the values of S, N1, and N2 are all configurable in the fsw.
180 Seconds	A record is produced every 180 seconds.

The Mode column uses the following key phrases:

NA	Not Applicable to a data mode collection pattern
Ion Species	Data is collected using the Ion Species Instrument mode ¹
Ion Energy	Data is collected using the Ion Energy Instrument mode ¹
Electron Energy	Data is collected using the Electron Energy Instrument mode ¹

¹ – See the instrument paper for a description of the various instrument modes.

Certain strings in the Product Names relate to the accumulation time and resolution of the energy spectra. These strings are best interpreted as:

LEHT	Low Energy Resolution High Time Resolution
HELT	High Energy Resolution Low Time Resolution

Table 3-4 RBSPICE Data Products and Instrument Modes

APID	Product	ProductName	Frequency	Mode
301	Command Echo	Commands	As needed	NA
302	Alarm	Alarms	As needed	NA
303	Memory Checksum	MemoryChecksum	On Demand	NA
304	Memory Dump	MemoryDump	On Demand, 1/sec	NA
305	Status	Status	Commandable	NA
306	Boot Status	BootStatus	Commandable	NA
307	Macro Dump	MacroDump	On Demand, 1/sec	NA
308	Macro Checksums	MacroChecksums	On Demand	NA
309	Monitor Limits	MonitorLimits	On Demand	NA
30A	Parameters	Parameters	On Demand	NA
30B	Text	Text	On Demand	NA
30C	Pixel Parameters	PixelParameters	On Demand	NA
30D	NA			
30E	NA			
30F	NA			
310	Critical Housekeeping	CHSK	Every Second	NA
311	Space Weather	SW	Every Spin	Ion Species
312	Electron Energy Basic Rates	EBR	S Sectors	Electron Energy
313	Ion Energy Basic Rates	IBR	S Sectors	Ion Energy
314	Ion Energy Diagnostic Rates	IEDR	S Sectors	Ion Energy
315	Ion Species Basic Rates	ISBR	S Sectors	Ion Species
316	Ion Species Diagnostic Rates	ISDR	S Sectors	Ion Species
317	LER-HTR Electron Spectra	ESRLEHT	S Sectors	Electron Energy
318	HER LTR Ion Spectra	ISRHELT	S*N1*N2 Sectors/Spins	Ion Energy
319	HER LTR Electron Spectra	ESRHELT	S*N1*N2 Sectors/Spins	Electron Energy
31A	TOFxEnergy Ion Energy Spectra	TOFxE_Ion	S*N1*N2 Sectors/Spins	Ion Species
31B	TOFxEnergy Proton Rates	TOFxE_H	S Sectors	Ion Species
31C	TOFxEnergy Non-Proton Rates	TOFxE_nonH	S*N1 Sectors	Ion Species
31D	LRHTR TOFxPH Proton Rates	TOFxPH_H_LEHT	S Sectors	Ion Species
31E	HRLTR TOFxPH Proton Rates	TOFxPH_H_HELT	S*N1*N2 Sectors/Spins	Ion Species
31F	Raw Electron Energy Events	REEE	S Sectors	Electron Energy
320	Raw Ion Energy Events	RIEE	S Sectors	Ion Energy
321	Raw Ion Species Events	RISE	S Sectors	Ion Species
322	Priority Events	Priority	S Sectors	Ion Species
323	Auxiliary	Aux	Every Spin	NA
324	ERM Data	ERM	180 seconds	NA

3.5 RBSPICE DATA PRODUCT PRODUCTION STEPS (HIGH LEVEL OVERVIEW)

The RBSPICE automation system performs the following processing steps, in the order listed:

- 1) Download Processing
Nightly, a set of download scripts is triggered to bring down data that require processing.
 - a. SPICE Files
 - b. Mission Operations Center (MOC) Telemetry Files
 - c. EMFISIS Level 2 Magnetic Field Files
 - d. ECT Level 2 Magnetic Ephemeris Files
- 2) SPICE Processing
Key XML scripts are modified in this step to integrate new SPICE kernels into the overall system.
- 3) MOC Data Organization
RBSPICE data downloaded from the MOC is moved to a final directory within the overall repository directory structure, based upon the APID of the data product.
- 4) Data Characterization
The system does a full file read to provide a detailed characterization of each file including the actual start and stop times of the data, the total number of records, and other relevant information. This information is entered into a processing control database, which is the primary driver for subsequent data processing.
- 5) Level 0 Processing – Daily Files in which each record start time occurs in the specified day/year
A Processing Script is read, identifying which Level 0 Data Products are to be produced.
 - a. Telemetry data files for each product are then read.
 - b. The data is extracted into the database.
 - c. A Comma Separated Values (CSV) text-based Level 0 data file is produced.
 - d. A Common Data Format (CDF) Level 0 data file is produced.
- 6) Level 1 Processing
A Processing Script is read, identifying which Level 1 Data Products are to be produced.
 - a. Counting data files for each product are then read.
 - b. The counts for each record are then converted into a rate, in units of Counts/Second.
 - c. A CSV text-based Level 1 data file is produced.
 - d. A CDF Level 1 data file is produced.
- 7) Level 2 Processing
A Processing Script is read, identifying which Level 2 Data Products are to be produced.
 - a. Rate data files for each product are then read.
 - b. The rates for each record are then converted, using the RBSPICE calibration data, into particle intensities (flux) in units of counts/(sec*sr*cm²*MeV).
 - c. A CSV text-based Level 2 data file is produced.
 - d. A CDF Level 2 data file is produced.
- 8) Level 3 Processing
A Processing Script is read, identifying which Level 3 Data Products are to be produced.
 - a. Intensity data files for each product are then read.
 - b. The Magnetic Field data for the time frame is then loaded.
 - c. The Magnetic Ephemeris data for the time frame is then loaded.
 - d. Pitch Angles for each telescope look direction are calculated, using the SPICE system.
 - e. A CDF Level 3 data file is produced.

9) Level 3 Pitch Angle and Pressure (PAP) Processing

A Processing Script is read, identifying which Level 3 PAP Data Products are to be produced.

- Level 3 data files for each product are then read
- The intensity data is binned according to a specified pitch angle binning schema
- The aggregate data (pressures, density, omnidirectional flux, integrated flux) are calculated
- A CDF Level 3 PAP data file is produced

3.6 RBSPICE DATA PRODUCT PRODUCTION STEPS (DETAILED PROCESSING ALGORITHMS)

The RBSPICE SOC software system is comprised of a set of processing workflows (see previous section) in which the underlying software system triggers different processing code for each workflow. The following sections detail the algorithms used in the creation of the Level 0 Count Files, the Level 1 Rate files, the Level 2 Intensity (flux) files, and the Level 3 Pitch Angle files. Details presented for each of these steps are sufficient to allow other software developers to write their own translation workflow. (Note that only the RBSPICE SOC data files are considered the Official release of the data, and any files produced by outside agents using these algorithms are considered unofficial even though they might be identical in content.)

3.6.1 Level 0 Processing Algorithms

Level 0 data is generated by directly decoding telemetry into binary data values. The encoding is described completely in the RBSPICE Instrument Flight Software and needs no additional description. Specific aspects of the telemetry to Level 0 processing are explained below.

The data fields described are used throughout the various workflows to generate products for Level 0 through Level 3.

Timing values

Field Name	Type	Description	Allowed Values
SCLOCK	UInt32	The value of the SCLOCK at the beginning of the spin	0...4294967295
Fine SCLOCK	UInt16	The value of the RBSPICE high resolution clock at the beginning of the spin units of $(1/2^{16})$ seconds One tick of the Fine SCLOCK value is equivalent to 15.25855624... microseconds	0...65535
Spin	UInt16	The current spin number as received from the SC in the 1 PPS signal	0...65535
Spin Duration	UInt32	The value of the spin period in milliseconds used by the RBSPICE flight SW in units of milliseconds	5000...20000

Accumulation Mode values – used in the calculation of accumulation duration to convert counts to rates (see below)

Field Name	Type	Description	Values
Integration Sectors – S	Byte	Number of sectors used in the RBSPICE fast accumulation mode	1-36
Integration Multiplier 1 – N1	Byte	Multiplication factor used to control the number of sectors accumulation in medium modes	1-36
Integration Multiplier 2 – N2	Byte	Multiplication factor used to control the number of sectors accumulated in slow modes	1-36
Integration Spin - Spin _i	Byte	Number of spins to include in the slow accumulation mode	1-20

Pixel Size Values – used in the calculation of intensity (flux)

Field Name	Type	Description	Values
Electron Pixel - e _{pixel}	Bool	Identifies whether we are using the small pixel (0) or the large pixel (1) size in electron energy mode	0-1
Ion Energy Pixel - IE _{pixel}	Bool	Identifies whether we are using the small pixel or the large pixel in ion energy mode	0-1
Ion Species Pixel - IS _{pixel}	Bool	Identifies whether we are using the small pixel or the large pixel in ion species mode	0-1

Data Collection Pattern - used in the calculation of accumulation start/stop times and duration to convert counts to rates

Field Name	Type	Description	Values
Subsector 1 – DCP[0]	Byte	Identifies what accumulation mode is used in the first half of the sector 0=Electron Energy, 1=Ion Energy, 2=Ion Species	0-2
Subsector 2 – DCP[1]	Byte	Identifies what accumulation mode is used in the third quarter of the sector	0-2
Subsector3 – DCP[2]	Byte	Identifies what accumulation mode is used in the fourth quarter of the sector	0-2

Spin Data – used in the calculation of pitch angles

Field Name	Type	Description	Values
Spin Data Valid – valid _{spin}	Bool	Identifies if the spin value from the SC is valid or not, 0=invalid, 1=valid	0-1
Mag Data Valid - valid _{mag}	Bool	Identifies if the magnetic field value from SC is valid or not	0-1
Mag Phase Valid - valid _{phase}	Bool	Identifies if the magnetic field phase value from SC is valid or not	0-1

Time Stamp Generation

The telemetry product X323 (Auxiliary) is the only component of the received RBSPICE telemetry that provides the ability to create a high time resolution conversion from spacecraft clock (SCLOCK) plus the RBSPICE instrument internal timer (Fine SCLOCK), which is used for data accumulation in the counters, to ephemeris time (ET) representing the real time on a clock. The X323 packets are generated by the RBSPICE instrument at the end of each spin. The packets include a time stamp derived from the timing information provided by the spacecraft in the “1 PPS (Pulse Per Spin) SC to Instrument” data packet. The SCLOCK value cycles from 0 to 4294967295 and then repeats. The Fine SCLOCK value cycles from 0 to 65535 and is in units of $(1/2^{16})$ seconds. In general, each tick of the SCLOCK is approximately 1 second, although this relationship can drift depending upon the heating and cooling of the spacecraft. The SCLOCK value is not a unique value, but repeats every 136.19 years. Since the Van Allen Probes Mission is a nominal two-year mission, it is expected that the SCLOCK value never repeats over the life of the mission. However, environmental factors could trigger a reset of the SCLOCK.

Because the Van Allen Probes spacecraft orbit through extreme radiation environments, it is expected that at some time a Single Event Upset (SEU) will occur, causing the SCLOCK to reset on one or both of the spacecraft. One of the mission requirements assigned to the Mission Operations Center (MOC) is to ensure the SCLOCK value is unique and monotonic throughout the life of the mission, including extended mission phases, even in the event of an SEU. The RBSPICE SOC has written the processing software with the assumption that the SCLOCK value provided to the RBSPICE instrument is unique and will never repeat. When combined with the Fine SCLOCK value, the resulting time value provides RBSPICE scientists the ability to meet the 2-3 millisecond resolution requirement definition specified for inter-instrument calculations, as specified in the instrument requirement documents.

The X323 telemetry record time stamps are decoded by the RBSPICE SOC software system and the resulting SCLOCK and Fine SCLOCK values are converted into a time stamp using the following algorithm:

1. The Fine value is converted into seconds as $\text{fine} \times (1/2^{16})$ and then converted into SPICE fine seconds $(1/5 \times 10^4)$ i.e. in units of 20 milliseconds per tick.
2. The SCLOCK data value from telemetry along with the Fine SCLOCK value (see step 1) is converted into a timestamp by use of the JPL SPICE software system and the MOC-provided RBSP (A/B) SPICE SCLOCK kernels. (Note that the SPICE system has a high resolution mapping kernel that relates SCLOCK values to ET, which is defined in the J2000 EPOCH.)
3. The next step in the process is to get the ET value at the start of each sector. The RBSPICE flight software divides a spin into 36 sectors. At the end of the spin, the spin duration value of the just finished spin is reported in the X323 telemetry record. With the ET value (from step 2) of the start of the spin and the spin duration in milliseconds, it is possible to directly calculate the ET value at the start of each sector:

$$\text{sector}_{\text{duration}} = \frac{\text{spin}_{\text{duration}}}{36}$$

$$\text{sector}_{\text{et}} = \text{spin}_{\text{et}} + \text{sector}_{\text{number}} * \text{sector}_{\text{duration}}$$

where $\text{sector}_{\text{number}}$ varies from 0 through 35
and $\text{sector}_{\text{et}}$ is the ephemeris time at the start of the sector

Most other telemetry packets received from the RBSPICE instrument contain the spin and sector numbers at the start of the telemetry packet, so that ET at the start of an accumulation can be easily calculated.

Duration of Measurement and Start/Stop Times

During the process of generating the timestamp for each measurement, the level 0 processing system also calculates the duration of each measurement. This is not as simple as merely calculating the start time of each measurement and subtracting it from the

start of the previous measurement since the RBSPICE instrument has three possible measurement modes which can be assigned to one of the three available subsector measurement time frames. To understand this fully, it is necessary to understand how the RBSPICE instrument takes measurements. Each sector is divided into three subsectors. Subsector 0 spans the first half of the sector; subsector 1 spans the third quarter of the sector, and subsector 2 spans the fourth quarter of the sector.



Figure 3-1 Sector and subsector scheme used by RBSPICE also showing inter-subsector dead times.

The RBSPICE instrument can be commanded to use one of the three measurement modes (electron energy, ion energy, and ion species) during each of the subsectors, providing the ability to simultaneously measure electrons and ions within a sector or, alternatively, to use a single type of measurement for higher resolution science. Also shown in the diagram is the instances of “dead time” which occur at the end of each subsector due to the instrument must reconfiguring itself for the next subsector. This portion of the subsector time must be subtracted from the overall time of the subsector to properly calculate the total duration of the measurement. The response of the RBSPICE electronics shows that a transition from subsector 2 to subsector 0 takes 4.04 milliseconds and a transition from subsector 0 to 1 or subsector 1 to 2 takes 3.95 milliseconds. The key values required to properly calculate the measurement duration are found in the X323 telemetry packet (see above): Spin Duration (in seconds), Accumulation Mode Values (S, N1, N2, and Spin) and Data Collection Pattern (DCP). For each time measurement, the timing system queries the Auxiliary data from the RBSPICE database for the current running value of each of these variables. The timing system also identifies the type of data product being processed. By using the following table, the system understands the frequency of the measurement for the product and which DCP mode applies to the measurement.

Table 3-4 Data Collection Pattern and Frequency by APID

APID	Product	Product Name	Frequency	DCP mode
301	Command Echo	Commands	As needed	NA
302	Alarm	Alarms	As needed	NA
303	Memory Checksum	MemoryChecksum	On Demand	NA
304	Memory Dump	MemoryDump	On Demand, 1/sec	NA
305	Status	Status	Commandable	NA
306	Boot Status	BootStatus	Commandable	NA
307	Macro Dump	MacroDump	On Demand, 1/sec	NA
308	Macro Checksums	MacroChecksums	On Demand	NA
309	Monitor Limits	MonitorLimits	On Demand	NA
30A	Parameters	Parameters	On Demand	NA
30B	Text	Text	On Demand	NA
30C	Pixel Parameters	PixelParameters	On Demand	NA
30D	NA			
30E	NA			
30F	NA			
310	Critical Housekeeping	CHSK	Every Second	NA
311	Space Weather	SW	Every Spin	Ion Species

312	Electron Energy Basic Rates	EBR	S Sectors	Electron Energy
313	Ion Energy Basic Rates	IBR	S Sectors	Ion Energy
314	Ion Energy Diagnostic Rates	IEDR	S Sectors	Ion Energy
315	Ion Species Basic Rates	ISBR	S Sectors	Ion Species
316	Ion Species Diagnostic Rates	ISDR	S Sectors	Ion Species
317	LER-HTR Electron Spectra	ESRLEHT	S Sectors	Electron Energy
318	HER LTR Ion Spectra	ISRHELT	S*N1*N2 Sectors/Spins	Ion Energy
319	HER LTR Electron Spectra	ESRHELT	S*N1*N2 Sectors/Spins	Electron Energy
31A	TOFxEnergy Ion Energy Spectra	TOFxE_Ion	S*N1*N2 Sectors/Spins	Ion Species
31B	TOFxEnergy Proton Rates	TOFxE_H	S Sectors	Ion Species
31C	TOFxEnergy Non-Proton Rates	TOFxE_nonH	S*N1 Sectors	Ion Species
31D	LRHTR TOFxPH Proton Rates	TOFxPH_H_LEHT	S Sectors	Ion Species
31E	HRLTR TOFxPH Proton Rates	TOFxPH_H_HELT	S*N1*N2 Sectors/Spins	Ion Species
31F	Raw Electron Energy Events	REEE	S Sectors	Electron Energy
320	Raw Ion Energy Events	RIEE	S Sectors	Ion Energy
321	Raw Ion Species Events	RISE	S Sectors	Ion Species
322	Priority Events	Priority	S Sectors	Ion Species
323	Auxiliary	Aux	Every Spin	NA
324	ERM Data	ERM	180 seconds	NA

The timing system calculates the duration of the measurement using the following algorithm:

- 1) Use the current Spin Duration and calculate:
 - a. Accumulation time of a sector – acc_{sector}
 - b. Duration of $\frac{1}{4}$ of a sector (or a subsector) - $dur_{subsector}$
- 2) Identify the Product Accumulation Factor (S, S*N1, S*N1*N2, S*N1*N2/Spins) from the above table
 - a. Use the values of S, N1, N2, and Spin_i to calculate the multiplication factor
 - i. factor = S;
 - ii. factor = S*N1; or
 - iii. factor = S*N1*N2
 - b. If this measurement is done over multiple spins, i.e. (S*N1*N2/Spins), then we also need to query the database for the spin duration of each spin included in the measurement so that the timing can be calculated as precisely as possible for each spin in the measurement, i.e. acc_{sector} and $dur_{subsector}$ are recalculated for each value of spin duration.
- 3) For the current product, identify which subsectors (0, 1, or 2) are involved in this measurement for the DCP mode derived from the table.
 Note that this measurement mode could be used in all possible combinations of subsectors (0, 1, and/or 2), but since we are working with a particular product with real data, there has to be at least one subsector involved (otherwise we wouldn't have data for the product!)
- 4) Create two variables to capture the durations:
 - a. AccumTime – to capture the total amount of sector/subsector time available in the measurement
 - b. DeadTime – to capture the amount of dead time involved in the measurement
- 5) For each spin that is involved in the measurement, calculate the sector and subsector times based upon the spin duration for each spin:
 - a. For each DCP that is involved in the measurement
 - i. Add the subsector time ($sub0=2*dur_{subsector}$, $sub1=dur_{subsector}$, $sub2=dur_{subsector}$) to the current AccumTime
 - ii. Add the specific DeadTime to the DeadTime duration
 1. In going from subsector 2 to subsector 0, the DeadTime is 4.04 milliseconds

2. In going from subsector 0 to 1 or 1 to 2, the DeadTime is 3.95 milliseconds
- 6) Calculate the duration of the measurement (Duration) as: (AccumTime – DeadTime)*factor for each spin.
- 7) Calculate the start/stop time for the accumulation
 - a. The start time is the start of the accumulation at the start of the first subsector involved in the measurement.
 - b. The stop time is the end time of the last subsector involved in the measurement.
 - i. For products accumulated over a single spin, this becomes simply
 $\text{endET} = \text{startET} + \text{duration} + \text{DeadTime}$; or $\text{endET} = \text{startET} + \text{AccumTime}$;
 - ii. For products accumulated over multiple spins
 1. For the first spin, add in the time from the start of the measurement to the end of the last subsector of the last sector measured in that spin.
 2. For each subsequent spin (except the last), add in the total time of the spin.
 3. For the last spin, add in the time to go from the start of the spin to the end of the last subsector of the last sector of the measurement.
- 8) Calculate the Midpoint time for the accumulation:
 - a. For single spin measurements, this is $\text{startET} + (\text{endET} - \text{startET})/2$
 - b. For multiple spin measurements, this is a very complex problem since the midpoint from startET to endET would not necessarily occur in the middle of the sectors that are participating in the accumulation. This can be seen most clearly in the following table in which we are starting our accumulation in sector 0 and accumulating over 4 sectors and 10 spins, i.e. $S = 1$, $N1 = 2$, $N2 = 2$, and $\text{Spin}_1 = 10$. The sectors involved in the measurement are identified in the table as green with two white squares in the middle; the location of the start and end times are obvious. The red square outside the actual accumulation time is the false midpoint time taken as simply the $\text{startET} + (\text{endET} - \text{startET})/2$, showing that this algorithm does not work correctly. The actual midpoint time is shown in the middle of the two white squares and is based upon the correct calculation of the midpoint time. This table (and others) were used to generate an algorithm to properly calculate what the actual midpoint of the measurement is, based upon the starting sector, the number of sectors involved, and the number of spins involved.

Table 3-5 Sample multi-spin accumulation showing the false (red) and true (white) midpoint times of the accumulation.

Start ET	Spin Dur	Sector	SubSe c	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	
410270 537.6	10.88 4	0.30233 3333	0.07558 3333																																					
410270 548.4	10.88 3	0.30230 5556	0.07557 6389																																					
410270 559.3	10.88 2	0.30227 7778	0.07556 9444																																					
410270 570.2	10.88 2	0.30227 7778	0.07556 9444																																					
410270 581.1	10.88 3	0.30230 5556	0.07557 6389																																					
410270 592	10.88 2	0.30227 7778	0.07556 9444																																					
410270 602.9	10.88 2	0.30227 7778	0.07556 9444																																					
410270 613.7	10.88 2	0.30227 7778	0.07556 9444																																					
410270 624.6	10.88 3	0.30230 5556	0.07557 6389																																					
410270 635.5	10.88 3	0.30230 5556	0.07557 6389																																					

RBSPICE Status Control information

The telemetry product X305 (Status) includes a small number of values that are necessary to one or more of the workflows as the data is processed from Level 0 to Level 3. These fields are described below:

Field Name	SoftName	Description	Values
TOFxPH Deprecation	TOFxPH	Identifies how the TOFxPH events are collected: 0-disabled (TOFxPH isn't used) 1-Enable All 2-Enable 1 of 2 (i.e. collect 1 out of every 2) 3-Enable 1 of 4	0-7

4-Enable 1 of 8
5-Enable 1 of 16
6-Enable 1 of 32
7-Enable 1 of 64

RBSPICE Basic Rate Information (EBR, IBR, and ISBR)

There are three telemetry products related to collection of basic rate statistics that are critical in processing RBSPICE data from Level 0 to Level 1, and are part of the R_{in} versus R_{out} algorithms described in the Level 1 Processing Algorithms section (3.6.2).

The fields from each of these three telemetry products are as follows:

Electron Basic Rates (X312) and Ion Energy Basic Rates (X313) – Ancillary Data Values

Field Name	SoftName	Description	Units	Type	Values
SSD Counters	SSD[0..5]	Counts events above the SSD energy threshold for each telescope	Counts	UINT32[6]	0...
SSD Dead Time	SSDDead[0..5]	Integrates the amount of dead time in each SSD for each telescope	100ns	UINT32[6]	0...
State Machine Idle	SMI	Event State Machine Idle Time	100ns	UINT32	0...
Multiple Hit Reject	MHR	Counts number of events rejected due to simultaneous energy channel events	Counts	UINT32	0...
Valid Energy Events	VEE	Counts the number of valid energy events	Counts	UINT32	0...
Valid Events Queued	VEQ	Counts the number of valid energy events placed in the FIFO	Counts	UINT32	0...
Valid Events Processed	VEP	Counts the number of valid energy events processed by the flight software	Counts	UINT32	0...

Ion Species Basic Rates (X315) – Ancillary Data Values

Field Name	SoftName	Description	Units	Type	Values
Start 0 Anode	Start0	Counts the number of events above the start0 anode threshold	Counts	UINT32	0...
Stop 0 Anode	Stop0	Counts the number of events above the stop0 anode threshold	Counts	UINT32	0...
TOF Coincidence	TOF	Counts the number of events where the start and stop are within the 200ns window	Counts	UINT32	0...
Pulse Height	PH	Counts the number of events above the TOF pulse height threshold	Counts	UINT32	0...
Start Counters	Start[0..5]	Counts the number of events calculated to be at the given start position per telescope	Counts	UINT32	0...
SSD Counters	SSD[0..5]	Counts the number of events above the SSD threshold	Counts	UINT32[6]	0...
SSD Dead Time	SSDDead[0..5]	Integrates the amount of dead time in each SSD for each telescope	100ns	UINT32[6]	0...
State Machine Idle	SMI	Event State Machine Idle Time	100ns	UINT32	0...
Multiple Hit Reject	MHR	Counts the number of events rejected due to simultaneous energy channel events	Counts	UINT32	0...
Valid TOFxPH Events	TOFxPH	Counts the number of valid TOFxPH events	Counts	UINT32	0...
Valid TOFxE Events	TOFxE	Counts the number of valid TOFxE events	Counts	UINT32	0...
Valid Events Queued	VEQ	Counts the number of valid energy events placed in the FIFO	Counts	UINT32	0...
Valid Events Processed	VEP	Counts the number of valid energy events processed by the flight software	Counts	UINT32	0...

3.6.2 Level 1 Processing Algorithms

The primary activity in processing the Level 0 data into Level 1 data is to convert the count data into rate data. This is done in a series of algorithmic steps in which the Level 0 count data is read into memory, the duration of the measurement is loaded from the Level 0 file, the counts themselves are adjusted according to the R_{in} vs R_{out} algorithm, and the rate data is then written to a Level 1 file. The following constants and variables are used throughout the subsequent sections:

Name	Description	Type	Value(s)
MaxIDLE	Maximum number of 100ns intervals for which data can be accumulated	UInt32	969938
ClkPeriod	Number of nanoseconds in the RBSPICE DPU clock period	UInt32	100
ST _{Dead}	Start counter dead time due to synchronization logic	UInt32	2

SP _{Dead}	Stop counter dead time due to synchronization logic	UInt32	2
SP _{Veto}	Interval in which additional stop pulses cause the event to be discarded	UInt32	2
RDT _{Veto}	Interval for inhibiting start and stop counter during chip TOF reset	UInt32	1
PKD _{Reset}	Interval for resetting the peak detector	UInt32	4
PUR _{Veto}	Interval during which a second SSD pulse causes the event to be discarded	UInt32	7

R_{in} vs R_{out} Algorithm and Formulae

Basic Rates

EBR (X312), IBR(X313), and ISBR(X315) telemetry includes the measured counts (SSD) and dead time (SSDDead) for each telescope. These values are converted to a rate value using the following algorithm:

For each telescope (where “tele” goes from 0 to 5)

$$\begin{aligned}
 \text{cycles} &= \frac{\text{duration}}{(1 * 10^{-9}) * \text{Clk}_{\text{Period}}} \\
 \text{delta} &= \text{cycles} - \text{ssdead}[\text{tele}] \\
 \text{rate} &= \frac{\text{ssd}[\text{tele}]}{\text{delta}} * (1 * 10^{-9}) * \text{Clk}_{\text{Period}}
 \end{aligned}$$

Energy Rates

Conversion of the counts obtained for the ESRLEHT(X317), ISRHELT(X318), and ESRHELT(X319) telemetry is somewhat more complicated, because the algorithm requires an understanding of the spin information (X323) and the basic rate data (EBR for ESRLEHT and ESRHELT, IBR for ISRHELT) to fully convert the count data into a rate. For purposes of this algorithm, the count values in the telemetry are called h_{ij} , where i refers to the telescope number and j refers to the energy channel of the measurement. Following is the algorithm used in the RBSPICE SOC software for each telescope and each energy channel:

- 1) If the count is zero, return a rate of 0.0
- 2) Identify the number of sectors involved in the measurement, based upon the frequency of the product (S, S*N1, S*N1*N2/Spins) – for an example see table 3-5.
- 3) Calculate the default rate as: $\text{defaultrate} = \frac{h_{ij}}{\text{duration}}$
- 4) If the measurement spans a single spin
Get the basic rate energy data object (*erd*) for the current SCLOCK, Spin, and Sector
- 5) If the measurement spans multiple spins
Get a conglomerate basic rate energy data object (*erd*) for the current SCLOCK, Spin, and Sector for each involved spin
- 6) If *erd* = null, return the *defaultrate* (i.e. we cannot do R vs R correction without the basic rate data)
(Note that there are some scenarios in which this is possible, but they are extremely rare.)
- 7) Get the following variables from the *erd* object:
 vee = valid energy events
 vep = valid events processed
 idle = state machine idle
 ssd = basic count for the current telescope
 ssddead = basic count dead time for the current telescope
- 8) Calculate the basic rate, *brate*, (see section above) using the values returned in the *erd* object
- 9) Calculate each of the following terms (*cipkd_{reset}* and *cipur_{veto}*) using the following formula:

$$\begin{aligned}
 \text{cipkd}_{\text{reset}} &= e^{\text{brate} * \text{PKD}_{\text{reset}} * (1 * 10^{-9}) * \text{Clk}_{\text{Period}}} \\
 \text{cipu}_{\text{veto}} &= e^{\text{ssd} * \frac{\text{PUR}_{\text{veto}}}{\text{MaxIdle}}} \\
 \text{rate}_{ij} &= \frac{h_{ij} * \text{vee}}{\text{vep} * \text{idle} * (1 * 10^{-9}) * \text{Clk}_{\text{Period}}} * \text{cipkd}_{\text{reset}} * \text{cipu}_{\text{veto}}
 \end{aligned}$$

This algorithm can produce rates that are smaller than the default rate at somewhat low counting times. The SOC software tests for this condition and returns the default rate if the calculated rate is smaller. Note that the SOC software has conditions on the level of failure built into the processing, such that if the percent error of the calculated rate versus the default rate (in an error

condition) is significantly high, then a particular file will fail so that more investigation can be made to better understand the situation. Eventually the file will be allowed to succeed, once it has been understood and recognized that no significant processing issue is involved.

Species TOFxPH Rates

The conversion of the species mode TOFxPH measurements for products TOFxPHLEHT (X31D) and TOFxPHHHELT (X31E) follows a similar algorithm as discussed for the calculation of Energy Rates (see above). The key difference is in the values used from the Ion Species Basic Rate data object (*erd*) and the formulas of step 9:

- 7) Get the following variables from the *erd* object:
vtofxe = valid TOFxE events
vtofxph = valid TOFxPH events
vep = valid events processed
idle = state machine idle
ssd = basic count for the current telescope
ssddead = basic count dead time for the current telescope
stop0 = number of events above the Stop 0 threshold
- 9) Calculate each of the following terms (*efact*)

$$efact = e^{\frac{stop0 * SP_{veto}}{Max_{idle}}}$$
$$rate_{ij} = \frac{h_{ij} * (vtofxe + vtofxph)}{vep * idle * (1 \times 10^{-9}) * Clk_{period}} * efact$$

Species TOFxE Rates

The conversion of the species mode TOFxE measurements for products TOFxElon (X31A), TOFxEH (X31B), and TOFxEnonH (X31C) follows a similar algorithm as discussed above for Energy Rates and Species TOFxPH rates (see above). Again the key difference is what values are acquired in Step 7 and the formula in Step 9.

- 7) Get the following variables from the *erd* object:
vtofxe = valid TOFxE events
vtofxph = valid TOFxPH events
vep = valid events processed
idle = state machine idle
ssd = basic count for the current telescope
ssddead = basic count dead time for the current telescope
stop0 = number of events above the Stop 0 threshold
- 9) Calculate each of the following terms (*efact*)

$$cipkd_{reset} = e^{brate * PKD_{reset} * (1 \times 10^{-9}) * Clk_{period}}$$
$$cipu_{veto} = e^{\frac{ssd * PUR_{veto}}{Max_{idle}}}$$
$$efact = e^{\frac{stop0 * SP_{veto}}{Max_{idle}}}$$
$$rate_{ij} = \frac{h_{ij} * (vtofxe + vtofxph)}{vep * idle * (1 \times 10^{-9}) * Clk_{period}} * cipkd_{reset} * cipu_{veto} * efact$$

Error Calculations for Rate Files

As counts are converted into rates, the Level 1 files capture the statistical Poisson error so that the information can be used in understanding and calculating the error propagation for scientific publications. The errors placed in the Level 1 files are done for each telescope and energy channel measured. Given a count, *n*, the calculated values are the percent error calculated as:

$$error = \frac{\sqrt{n}}{n} * 100\%$$

3.6.3 Level 2 Processing Algorithms

The primary activity in processing the Level 1 data into Level 2 data is to convert the rate data into particle intensity (flux) data. This is done in a series of algorithmic steps in which the Level 1 rate data is read into memory, the calibration data for the SC and product are loaded, the intensities are calculated, and the intensities are then written to a Level 2 file. Additional fields are added to the Level 2 file to match the Panel on Radiation Belt Environmental Modeling (PRBEM) standards for such data. See <http://craterre.onecert.fr/prbem/home.html> for a complete specification of this standard. Note that the Level 2 files do not include all required variables to meet the PRBEM standard, but instead those variables are added to the files to create the Level 3 final data products.

Conversion of Field Names into PRBEM standards

The PRBEM standards require all variables to fit specific field name guidelines. The RBSPICE SOC team has made every effort to utilize these guidelines. The Level 1 rate files contain variables of rate data with a CSV common name of T#_R where # represents the telescope, and a CDF common name of T#_Rates. The Level 2 PRBEM standard requires a variable that is species-specific, so the standard Intensity (Flux) variables contained in the Level 2 files are of the standard for F?DU, where “?” is a character representing the species of the variable. The individual characters have the following meaning:

Character	Interpretation	RBSPICE Values
F	Represents an Intensity or Flux	
?	Identifies the Species	I=Ion, H=Proton(Hydrogen), He=Helium, O=Oxygen, E=Electron
D	Identifies that the intensities are Differential in energy	
U	Identifies that the intensities are unidirectional and not omni-directional	

It should be noted that several RBSPICE products contain multiple intensity variables, because some of the products energy channels are responsive to different species of particles. While the variable names match the PRBEM standard, the variable sizes do not. When creating the intensity variables, it was prudent to create a two-dimensional array that contains the intensity for each telescope and channel combination. Energy channels that are NOT responsive to the particular species are written with a fill value in the CDF files and an empty field value in the CSV files.

Calculation of Intensities (Flux)

RBSPICE calibration data can be found at the following locations:

http://rbspice.ftecs.com/RBSPICEA_Calibration.html and http://rbspice.ftecs.com/RBSPICEB_Calibration.html.

The data is organized by product type and contains the necessary information needed to convert RBSPICE rate data into intensity (flux) data. The calibration data fields are described in the following table.

Name	Description	Type	Units	Values
SC	Identifies the SC for this record	String	NA	RBSPA or RBSPB
Product Type	Identifies the applicable product	String	NA	ESRHELT, ISRHELT, ESRLEHT, TOFxElon, TOFxEH, TOFxEnonH, TOFxPHHHELT, and TOFxPHHLEHT
Telescope	Allows the values to vary per telescope as the instrument starts degrading	Integer	NA	0 ... 5
StartUTC	Identifies when this calibration record is applicable	String	Time	Standard format of CCYY-MM-DDTHH:MM:SS.hhh
StartET	Identifies the Ephemeris Time when this record is applicable	Real	Seconds	315576066.183925 ... 788961666.183928

StopUTC	Identifies when ending time when this record is applicable	String	Time	Standard format of CCYY-MM-DDTHH:MM:SS.hhh
StopET	Identifies the ending ET when this record is applicable	Real	Seconds	315576066.183925 ... 788961666.183928
Species	Identifies the primary species of the measurement	String	NA	e=electron, Ion(Ions)=ion, H=proton, P=proton, He=Helium, O=Oxygen, X=not used
Channel	Energy channel	Integer	NA	0 ... total number of energy channels – 1
E_Low	Low end of the energy passband	Real	MeV	
E_High	High end of the energy passband	Real	MeV	
E_Mid	Midpoint of the energy passband	Real	MeV	
G_Small	Geometrical factor when the small pixels are used (See X323 data)	Real	cm ²	
G_Large	Geometrical factor when the large pixels are used (See X323 data)	Real	cm ²	
Eff	Efficiency of the passband	Real	NA	
Notes	Relevant information about channel	String	NA	

Rates are converted into Intensities using the following equation:

$$flux = \frac{rate}{(E_{High} - E_{Low}) * G * eff}$$

The specific value used of the geometrical factor, G , is based upon the current pixel value (small or large) contained in the X323 auxiliary data packet (see Level 0 processing for more information). The final CDF variable that is created to contain the intensities is a two-dimensional variable of type Real and sized as F?DU[tele,ch] so that it contains the data for each telescope and channel combination.

Additional Variables Added to Level 2 Data

A number of additional variables are added to the Level 2 data file during conversion. The following paragraphs and tables describe these variables and how they are calculated. Note the following notations: Real[ch] indicates a Real array with a size equivalent to the number of energy channels, Real[tl] indicates a Real array with a size equivalent to the number of telescopes, and Real[tl,ch] indicates a Real two-dimensional array with a size equivalent to the number of telescopes and energy channels.

Field	Description	Type	Units	Limits	Algorithm
L	Value of the McElwain L Shell for a Dipole Field	Real	R _E	0.0 to 10.0	$L = R / \cos(\theta)^2$
Position_SM	Position of SC in Solar Magnetospheric Coordinates	Real[3]	R _E	-10.0 to 10.0	SPICE
F?DU_Error	The Poisson statistical percent error (see Level 1 error)	Real[tl,ch]	%	0.0 to 100.0	$PE = \sqrt{n}/n * 100\%$
F?DU_Crosscalib_RMS	This variable is not used in the Level 2 files but exists for consistency with the PRBEM standards. Once inter-instrument calibration is finished this variable might be used to contain that information	Real[tl,ch]	NA		
F?DU_Energy	Midpoint energy for each energy channel	Real[tl,ch]	MeV	0.01 to 10	
F?DU_Energy_Range	The high and low energy values for the Channel Note that this variable does NOT follow the standard which asks for the delta low and high values	Real[tl,2,ch]	MeV	0.01 to 10	
FEDU_Quality	The data quality flag using the PRBEM standard. Note that currently the automation system only sets the value to 10 which is that the quality is	Integer[tl,ch]	NA	0 to 10	

	unknown. As algorithms are developed to clarify the quality of the data this value will be changed.				
--	---	--	--	--	--

Inter-Instrument Calibration

The RBSPICE energy measurements have been cross-calibrated with the MagEIS and HOPE energy measurements for similar energy channels. These calibration activities have resulted in adjustments to the efficiencies in the calibration table. At some time in the future the details of these calibration activities will be presented in this section.

RBSPICE Background

The current data files produced by the RBSPICE SOC are NOT background corrected for contamination due to energetic electrons and cosmic rays. At some time in the future this section will be completed with steps that describe the process required to background correct the RBSPICE intensity data.

3.6.4 Level 3 Processing Algorithms

The primary activity in processing the Level 2 data into Level 3 data is to calculate the pitch angles of the six telescopes, based upon the measured magnetic field received from the EMFISIS instrument. This processing is done in a series of algorithmic steps in which the EMFISIS magnetic field data is loaded, the ECT Magnetic Ephemeris data is loaded, the Level 2 intensity data file is copied, and the pitch angles are calculated and placed into the copied Level 2 file, creating a Level 3 file. Additional fields are added to the Level 3 file to fulfill the full standards of the PRBEM for such data. See <http://craterre.onecert.fr/prbem/home.html> for a complete specification of this standard.

Note that the Level 3 files are only created as CDF files. It was determined that the number of fields in the Level 2 CSV files was becoming excessive and that the additional fields added to the Level 3 files would make this even more cumbersome. The RBSPICE SOC can provide a CSV equivalent file for a small specific set of days, if a scientist does not have software to read-in the CDF files. These queries should be emailed to the RBSPICE SOC Lead.

EMFISIS Magnetic Field Data

The Level 2 UVW EMFISIS 60 hertz magnetic field data files were chosen to be used to calculate the RBSPICE pitch angles. These files contain data sampled at 60 Hz, so contain around 5 million samples per data file. In order to reduce the overall memory utilization and to reduce the overall processing requirements, these files were deprecated by a specific programmable number before being used to calculate Pitch Angles. . Currently the deprecation is set at a factor of 8. There is no filtering used during the deprecation stage of loading the magnetic field data into the database, but instead every 8th value was included.

ECT Magnetic Ephemeris Data

Some of the additional fields included in the RBSPICE Level 3 CDF files have data taken directly from the ECT Magnetic Ephemeris data files. The definitive Olsen Pfitzer 1977 quiet time files were used in this processing. The data fields chosen from these files are deemed relevant to understanding the RBSPICE energetic particle data.

Calculation of Pitch Angles

The pitch angle calculation uses the following algorithms in the order listed:

- 1) Verify that magnetic field data and magnetic ephemeris data exist; otherwise fail processing.
- 2) Verify that SPICE C-Kernels are available for the time frame to be processed.
- 3) For each record of the Level 2 intensity variable, do the following:
 - a. Get spin segment that applies to this record
 - i. This recognizes data products that accumulate over multiple spins
 - b. Create an array of start and stop times based upon the accumulation sectors for each spin involved and the available magnetic field data, i.e. this is start/stop for the actual B vectors, not for the accumulation time point.
 - c. Get a set of magnetic field vectors for each time point contained in the time segments defined in b.
 - d. Calculate the look direction for each telescope and each time point contained in the time segments defined in b.
 - e. Calculate a pitch angle for each look direction/magnetic field vector combination
 - f. Average all pitch angles to get a final pitch angle representative of the accumulation for this measurement
 - g. Set the pitch angle quality flag, as follows:

- i. Quality = 0 (good)
- ii. Quality = 1 (bad – poorly defined virtual spin period)
- iii. Quality = 2 (bad – no magnetic field data available)
- h. Set the minimum and maximum pitch angle values from the list of pitch angles as calculated above.
Note that the pitch angle range data is written in the F?DU_AlphaRange variable for each species in the file.
- i. Write the pitch angle data, as well as the other new variables for this measurement

Additional Level 3 Variables

A number of additional variables are added to the Level 3 data file while the pitch angles are being calculated. The following paragraphs and tables describe these variables and how they are calculated. Note the following notations: Real[ch] indicates a Real array with a size equivalent to the number of energy channels, Real[t] indicates a Real array with a size equivalent to the number of telescopes, and Real[t,ch] indicates a Real two-dimensional array with a size equivalent to the number of telescopes and energy channels.

Field	Description	Type	Units	Limits	Algorithm
Position	Position of SC in GSE coordinates	Real	R _E	-10.0 to 10.0	SPICE
Position_GSM	Position of SC in GSM Coordinates	Real[3]	R _E	-10.0 to 10.0	SPICE
Position Quality	PRBEM position quality flag, 0=good, 1=bad	Integer	NA	0 to 1	Always 0
Alpha	Calculated pitch angle for each telescope	Real[t]	Degrees	-90 to 90	See above
Alpha_Quality	Quality of the pitch angles calculated, 0=good, 1=bad	Real	NA	0 to 1	See above
L_Eq	Geocentric distance to B _{min} point for FL threading vehicle (i.e. P _{min})	Real	R _E	1.0 to 10	ECT Data
L_Star	Generalized Roederer L-shell value	Real	R _E	1.0 to 10	ECT Data (L_Simple)
L_StarArr	Modified McElwain L parameter for each telescope	Real[t]	R _E	1.0 to 10	ECT Data
I	Integral invariant for average pitch angle	Real			ECT Data
IArr	Integral invariant for each telescope pitch angle	Real[t]			ECT Data
K	Second Invariant (I*sqrt(Bm)) for average pitch	Real			ECT Data
Karr	Second Invariant (I*sqrt(Bm)) for each pitch angle	Real[t]			ECT Data
MLT	Magnetic Latitude of SC	Real	Degrees	-90 to 90	ECT Data
F?DU_Alpha	Copy of Alpha required in PRBEM standard	Real[t]	Degrees	-90 to 90	See above
F?DU_AlphaRange	Minimum/Maximum values of pitch angle over the accumulation period	Real[t,2]	Degrees	-90 to 90	See above

3.6.5 Level 3 Pitch Angle and Pressure (PAP) Processing Algorithms

The primary activity in processing the Level 3 data into Level 3 PAP data is to read the pitch angle data (flux (intensity) and pitch angles) from the Level 3 files for each set of measurements that occur within a single spin and to bin the observed intensities during this spin as a function of the pitch angle data for each energy channel. The final step of the system is to utilize the pitch angle binned data to calculate a variety of aggregate values for the data. The aggregate data includes the following fields: perpendicular partial particle pressure, parallel partial particle pressure, particle density for the given energy channels, the omnidirectional flux (intensity) observed for each energy channel, and finally the integrated particle flux (intensity). This processing is done in a series of algorithmic steps in which the level 3 RBSPICE data is loaded for the targeted product, the Level 3 error data is recalculated based upon the pitch angle binning weights, and the aggregate data is calculated. All of the new data is then placed into a Level 3 PAP file for each species of each data product.

The binned pitch angles are binned for all data that is available for each spin. A separate product is created for each species within any specific level 3 product. I.e. the TOFxE_nonH Level 3 data is used to create TOFxE_He and TOFxE_O data products. A pitch angle binning scheme is created for each product based upon input parameters associated with each product. At this time, all products utilize the same pitch angle binning scheme. This scheme creates seventeen (17) pitch angle bins. The first and last bins are fifteen (15) degrees wide and all other bins are ten (10) degrees wide. The scheme is symmetric and the center bin is centered on ninety (90) degrees and each subsequent bin both decreasing and increasing (except for boundaries) are

centered on ten (10) degree decrements. I.e. the pitch angle center array for this schema can be expressed as: {7.5, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 172.5}.

Binning of Pitch Angles and calculation of aggregate data

PAP data calculation uses the following algorithms in the order listed:

- 1) Verify that Rbspice Level 3 data exists; otherwise do nothing.
- 2) Create a pitch angle binning scheme based upon input parameters, currently 10 degree bins with 15 degree ends.
- 3) For each spin record of the Level 3 intensity variable, do the following:
 - a. Create a binned intensity array and initialize all records to -1.
 - b. Create a binned intensity weight array and initialize all records to 0.
 - c. Create a binned count array and initialize all records to 0.
 - d. Create an array per energy channel to contain the maximum and minimum observed binned intensities
 - e. For each record of the spin
 - i. If the pitch angle quality flag is bad go to the next record otherwise
 - ii. Get the pitch angle array which identifies the pitch angle of the observed particle for each telescope
 - iii. For each telescope of the intensity variable (for the specified species)
 1. Calculate the bin number for the pitch angle associated with this telescope
 2. If the value of the intensity bin position is -1 then set the value of the bin to the intensity
 3. Otherwise add the intensity to the binned intensity array
 4. Increment the weight number by one (1) for the intensity weight array
 5. Get the Poisson statistics error array and recalculate the counts and add to binned count array
 6. If the current binned intensity is greater than the max then set the max to the intensity
 7. If the current binned intensity is greater than zero but smaller than the min then set the min to the binned intensity
 - f. Divide the binned intensity array by the weight number array
 - g. Calculate the weighted error for each bin based upon the recalculated binned counts
 - h. Copy the other variables needed for the spin data record such as data quality flags, etc.
 - i. Calculate the mid-point and stop time of the spin record
 - j. Calculate the aggregate values:
 - i. Perpendicular/Parallel Partial Particle Pressure:

$$P_{\perp} = 2\pi \sum_E \sum_{\alpha} \sqrt{2mE} * dE * j(E, \alpha) * \frac{\sin^3 \alpha}{2} * d\alpha$$

$$P_{\parallel} = 2\pi \sum_E \sum_{\alpha} \sqrt{2mE} * dE * j(E, \alpha) * \sin \alpha * \cos^2 \alpha * d\alpha$$

- ii. Density:

$$n = 2\pi \sum_E \sum_{\alpha} j(E, \alpha) * \sqrt{\frac{m}{2E}} * dE * \sin \alpha * d\alpha$$

- iii. Omni-directional intensity per energy channel:

$$I_E = \frac{\sum_{\alpha} j(E, \alpha) * \sin \alpha * d\alpha}{\sum_{\alpha} \sin \alpha * d\alpha}$$

- iv. Integrated Intensity:

$$I = \frac{\sum_E \sum_{\alpha} j(E, \alpha) * dE * \sin \alpha * d\alpha}{\sum_{\alpha} \sin \alpha * d\alpha}$$

- k. Write the data record to the PAP data file

Level 3 PAP data fields and interpretations

Level 3 Pitch Angle and Pressure (PAP) data products are only created as CDF files and they contain the following set of fields. Note that the source identifies if the field is a calculated field (as in an aggregate or binned value), if it is copied from the Level 3 data source data, or if it is an averaged value or otherwise how the data is calculated.

Field	Description	Type	Units	Limits	Algorithm
Epoch	Time stamp of the midpoint of the spin	CDF_TT2000	Time		Start+ (Duration/2)
UTC	UTC string representing the time stamp of the midpoint of the spin	String	Time		Start+ (Duration/2)
DDOY	Decimal Day of Year	Double	Days	1.0 – 365.999	Calculated
ET	Ephemeris time stamp of the beginning of the spin	Double	Seconds		Copied
MidET	Ephemeris time stamp of the midpoint of the spin	Double	Seconds		Start + (Duration/2)
StopET	Ephemeris time stamp of the end of the spin	Double	Seconds		Start + Duration
Duration	Duration of the spin	Double	Seconds		Calculated
OrbitNumber	Assigned orbit number that includes start ET	Integer	NA	1-9999	Copied
Spin	Spin number for the data record	Integer	NA	0-65535	Copied
FspDU	Unidirectional Differential Flux units for species(sp)	Double[nE,nP]	$\#/(mm^2*sr*MeV*s)$	-1 = unsampled 0.0 – Big	See algorithm
FspDU_Weight	Weighting array used to normalize the binned flux	Integer[nE,nP]	NA	0-17	See algorithm
FspDU_PerpPressure	Perpendicular Partial Particle Pressure for species	Double	nPa	0.0-100	See algorithm
FspDU_ParaPressure	Parallel Partial Particle Pressure for species	Double	nPa	0.0-100	See algorithm
FspDU_Density	Calculated particle density for specific energy channels	Double	$\#/cm^3$	0.0-100	See algorithm
FspDU_IntegralFlux	Integrated flux (intensity) for specific energy channels	Double	$\#/(mm^2*sr*MeV*s)$	0.0 – Big	See algorithm
FspDU_OmniFlux	Omnidirectional flux (intensity) for each energy channel	Double[nE]	$\#/(mm^2*sr*MeV*s)$	0.0 – Big	See algorithm
FspDU_MinimFlux	Observed minimum intensity (excluding zero) for energy	Double[nE]	$\#/(mm^2*sr*MeV*s)$	0.0 – Big	See algorithm
FspDU_MaximFlux	Observed maximum intensity for each energy channel	Double[nE]	$\#/(mm^2*sr*MeV*s)$	0.0 – Big	See algorithm
FspDU_Error	Poisson Statistical error of FspDU variable	Integer[nE,nP]	NA	0 – 100	See algorithm
FspDU_Energy	Midpoint Energy of each energy passband	Double	MeV	0.0 – 10.0	Copied
FspDU_EnergyRange	Minimum/Maximum energies of each energy passband	Double	MeV	0.0 – 10.0	Copied
FspDU_Quality	Quality flag associated with FspDU variable	Integer	NA	0 – 10	See quality above
Position	Position of SC in GEO reference frame	Real[3]	R _E	-10.0 to 10.0	Copied
Position_SM	Position of the SC in SM reference frame	Real[3]	R _E	-10.0 to 10.0	
Position_GSM	Position of SC in GSM Coordinates	Real[3]	R _E	-10.0 to 10.0	SPICE
Position Quality	PRBEM position quality flag, 0=good, 1=bad	Integer	NA	0 to 1	Always 0
L	L value calculated using a dipole magnetic field	Real	R _E	1.0 – 10.0	Calculated
MLT	Magnetic latitude of SC calculated using Position_SM	Real	Hours	0 – 23.999	ECT Data
L_Eq	Geocentric distance to B _{min} point for FL threading vehicle (i.e. P _{min})	Real	R _E	1.0 to 10	ECT Data
L_Star	Generalized Roederer L-shell value	Real	R _E	1.0 to 10	ECT Data (L_Simple)
I	Integral invariant for average pitch angle	Real			ECT Data
PA_Midpoint	Midpoint of each pitch angle bin	Real[nP]	Degrees	0.0 – 180.0	Binning schema
PA_Range	Pitch Angle range for each pitch angle bin	Real[2]	Degrees	0.0 – 180.0	Binning schema
Channel	Indexing array for the number of energy channels	Integer[nE]	NA	0 – 59	
Bin	Indexing array for the number of pitch angle bins	Integer[nP]	NA	0 – 17	Binning schema
Axis	Indexing array for the position axes	Integer[3]	NA	0 – 2	
MinMaxRange	Indexing array for the min/max energy/PA arrays	Integer[2]	NA	0 – 1	

4 RBSPICE SOC DATA REPOSITORY DIRECTORY STRUCTURE

The top level structure of the RBSPICE SOC Data Repository is reflected in the figures in the following subsections. These figures show the overall structure of the directories and how the data is contained. As much as possible, the structure attempts to represent the overall structure of the management of the Van Allen Probes, itself. This is done to facilitate ease of access to any particular piece of data.

4.1 VAN ALLEN PROBES MOC DATA DIRECTORY STRUCTURES

Figure 4-1 describes the high level look at the directory structures used to represent the MOC data that is transferred to the RBSPICE SOC. The folder called MOCTelemetry is the Van Allen Probes MOC Data Products folder as downloaded directly from the MOC. The MOCTelemetry folder contains subfolders for each spacecraft (A and B). Within each of those folders is the specific data that the RBSPICE SOC utilizes for data production and scientific analysis. The folders themselves are logical views mapped to the original source folders within the folder structure.

RBSPICE->Data_Root->MOCTelemetry folder as downloaded from the MOC:

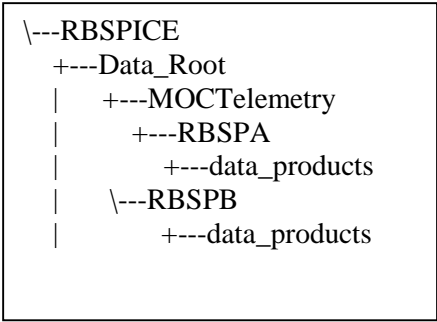


Figure 4-1 RBSP MOC Data stored in the RBSPICE Data Repository

4.2 RBSP SPACECRAFT DATA ORGANIZATION

Figure 4-2 represents the rest of the directory organization that contains the instrument specific data. The secondary level is organized by software and data subdirectories called “Software” and “Data_Root.” Each of these subdirectories contains a production folder and a development folder. Contained within each production and development folder are subfolders for each spacecraft (A and B). Each spacecraft folder contains the instruments’ data for that spacecraft. It is recognized that the RBSPICE SOC Data Repository might not contain data from any instruments other than EMFISIS and RBSPICE, but the directories will be maintained for completeness.

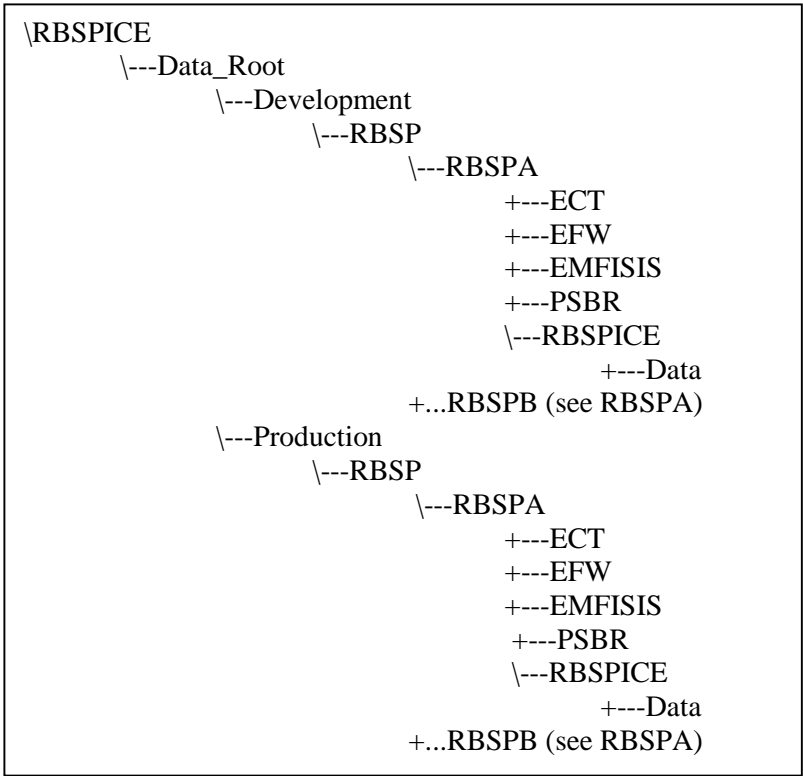


Figure 4-2 RBSP Spacecraft Data Directory Structure

4.3 EMFISIS DATA ORGANIZATION

Figure 4-3 represents the extent of the EMFISIS data that is needed to be contained within the RBSPIECE Data Repository.

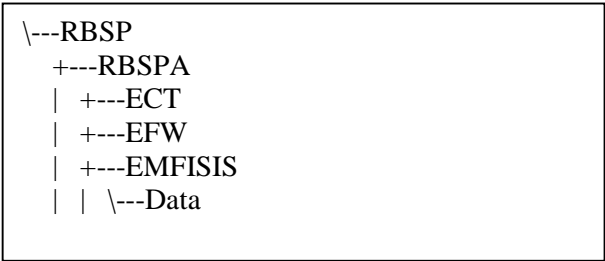


Figure 4-3 EMFISIS Directory Structure within the RBSPIECE Data Repository

4.4 RBSPIECE DATA ORGANIZATION

In this structure, there will be multiple products contained within the RBSPIECE Data directories; however, this figure shows only a sample product A. Table 4-1 shows the products that are to be maintained and the directory names that will be used for each. Table 3-2 shows the various levels for each of the data products that are to be produced. Each product directory will

contain a list of the relevant data for that product. This list of data includes the Mission Simulation data, Integration and Testing data (IT), Commissioning data, any relevant calibration data for the particular product, the telemetry received from the MOC, the Level 0 data received from the MOC, the Level 1-3 data products produced, any internally required data used in the generation of Level 4 data, the publishable Level 4 data, interim data needed in production, and finally the database repository that contains the relevant data for that product.

Figure 4-4 represents the RBSPICE data organizational structure that will be contained within the RBSPICE SOC Data Repository. Each spacecraft directory will contain its own respective data. Not all folders exist or are populated at this time.

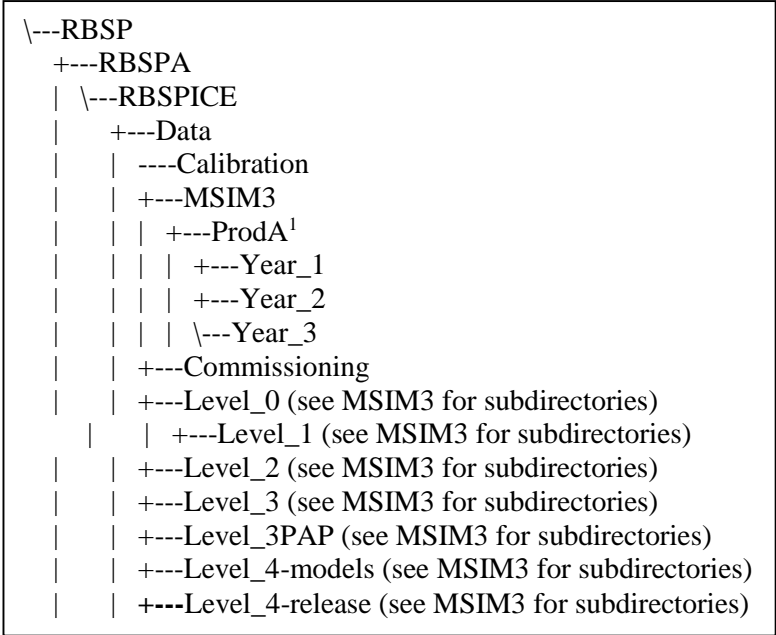


Figure 4-4 RBSPICE Data Directory Structure
Note: Product Mapping Directory follows in Section 4.5

4.5 PRODUCT DIRECTORY NAMING

Table 4-1 shows the list of data products, key variables, and the short directory names

Table 4-1 Mapping of Product to Short Directory Name

Product	Short Directory Name	Species	Energy Bins
Ion Basic Rate	IBR	Ion	NA
Electron Basic Rate	EBR	Electron	NA
Low Energy Res, High Time Res, Electron Species Rates	ESRLEHT	Electron	14
High Energy Res, Low Time Res, Electron Species Rates	ESRHELT	Electron	64
High Energy Res, Low Time Res, Ion Species Rates	ISRHELT	Ion	64
High Energy Res, Low Time Res, TOF _x PH Proton Rates	TOF _x PHHHELT	Protons	32
TOF _x E Proton Rates	TOF _x EH	Protons	14
TOF _x E Non Proton Rates	TOF _x EnonH	Heavy Ions	28
Low Energy Res, High Time Res, TOF _x PH Proton Rates	TOF _x PHHLEHT	Proton	10
TOF _x E Ion Species Rates	TOF _x EIon	Ion	64
Space Weather Rates	SWR	All	NA
Ion Species Basic Rates	ISBR	Ion	NA
Priority Events	PriorityEvents	NA	NA
Ion Energy Diagnostic Rates	IEDR	Ion	NA

Ion Species Diagnostic Rates	ISDR	Ion	NA
Raw Ion Species Events	RISE	Ion	NA
Raw Electron Energy Events	REEE	Electron	NA
Raw Ion Energy Events	RIEE	Ions	NA
Auxiliary Data	Aux	NA	NA
Critical Housekeeping Data	HSKP	NA	NA
Pitch Angles	PA	All	NA

Table 4-2 Mapping of Product to Short Directory Name for Level 3 PAP products – note that the energy bins can vary over the duration of the mission based upon the channel assignments in the flight software

Product	Short Directory Name	Species	Energy Bins
Time of flight by energy Proton data	TOFxEH	Protons	14
Time of flight by energy Helium data	TOFxEHe	Helium	9
Time of flight by energy Oxygen data	TOFxEO	Oxygen	9
Time of flight by pulse height Proton data	TOFxPHHHELT	Protons	20
High Energy Low Time resolution			
Time of flight by pulse height Oxygen data	TOFxPHOHELT	Oxygen	11
High Energy Low Time resolution			
Time of flight by pulse height Proton data	TOFxPHHLEHT	Protons	7
Low Energy High Time resolution			
Time of flight by pulse height Oxygen data	TOFxPHOLEHT	Oxygen	3
Low Energy High Time resolution			

5 PRODUCTION FILENAME CONVENTION

The filename convention used by the RBSPICE SOC Data Production software is derived directly from the recommended file naming convention suggested by the Van Allen Probes SOC Lead. The following is a direct copy from the document titled “**Filename Convention for Radiation Belt Storm Probes Common Data Format data files**” written by R. Freidel and modified by R. Barnes. Tables that are specific to the RBSPICE data files are presented following the basic naming convention specifications.

Multiple file formats will be produced by the RBSPICE SOC; however, the primary “flat file” storage format is in Common Data Format (CDF) as specified by the Space Physics Data Facility at Goddard Space Flight Center and more specifically by ISTP compliance requirements. Other formats will include ASCII Comma Separated Value (CSV) flat file versions of the RBSPICE data.

5.1 RBSP CDF FILENAMES

RBSP CDF files are comprised of a number of variable-length alphanumeric fields, followed by a filename suffix (“cdf”). All fields are required and are delineated by a field separator character, an underscore (“_”). Fields can be further divided into sub-fields, delineated by a dash (“-”). The distinction between a field and a sub-field is that a field is a required element that must always be included in the filename, and a sub-field is an optional element that may or may not be present. A filename parser can be safely coded to extract all fields from a filename and can optionally further extract sub-fields as needed.

The filename is of the form:

<source>_<type>_<descriptor>_<date>_<version>.cdf

Field	Description	Example
-------	-------------	---------

<source>	Data source identifier, comprised of sub-fields for mission (“rbsp”), spacecraft (“a” or “b”), and optionally the instrument suite.	“rbsp-a-ect”, “rbsp-b-emfisis”, “rbsp-a”
<type>	Data type, comprised of sub-fields for a short mnemonic data type identifier.	“pre”, “fnl-001”
<descriptor>	A short descriptor of the data included in the file.	“mag-L2”, “rbspice-L3”, “rps-ap003-l3”
<date>	Start date of the file in Universal Coordinated Time (UTC). Dates can either be in the form, “yyyymmdd” or “yyyymmddhhMMss”.	“20120201”, “20120830103000”
<version>	Version number consisting of the form “X.Y.Z-R”, where X is the major (interface) number, Y is the minor (quality number), Z is the revision number and R is an optional release number	“v1.1.1”, “v1.2.1”, “v2.2.1-100”
<ext>	Filename suffix indicating Common Data Format or compressed Comma Separated Value file using GZIP	“.cdf” or “.csv.gz”

Notes:

<source>

The source specifies the mission, the spacecraft (“a” or “b”), and may also include the instrument suite (e.g., rbspice).

<type>

The data type identifier is used to specify the providence of the data, for example: preliminary data (“pre”), final data (“fnl”).

Instrument teams are free to define additional types as needed for specific modes or products.

<descriptor>

The descriptor field is a short, human readable description of the data product. It should include the instrument and the data product level. Finer levels of description down to measurement type and even APID may be used if deemed appropriate.

<date>

The date is specified in Universal Coordinated Time (UTC). The length of the date field defines both the format of the date and the length of the file. Dates of the form “yyyymmdd” represent files that contain one UTC day of data. Files with the longer “yyyymmddhhMMss” specification represent files containing one orbit of data.

<i>Yyyy</i>	Year
<i>Mm</i>	Month
<i>Dd</i>	Day
<i>Hh</i>	Hour
<i>MM</i>	Minute
<i>Ss</i>	Second

<version>

The version number uses a variant of the industry standard version scheme for software of the form “vX.Y.Z”

- **X is the interface number.** Increments in this number represent that a significant change to the processing software or to the contents of the file has been made. These changes would require code changes to software readers and possibly changes to processing algorithms. The user should consult the appropriate meta-data for or change logs.
- **Y is the quality number.** This number represents a change in the quality of the data in the file, such as change in calibration or increase in fidelity. Changes should not impact software, but may require consideration when processing data.

- **Z is the bug fix/revision number.** This number changes to indicate minor changes to the contents of the file due to reprocessing of missing data.
- **R is the optional release number.** This number can be used to group a collection of data products which may have different version numbers. Depending on each instrument team’s method of data processing, a file may or may not have a release number. If the release number is omitted, it is assumed to be zero, so that if a team later decides to use release numbers, this change in procedure will not cause a subsequent problem in identifying release numbers. The release number is a monotonically increasing integer that is used to capture a set of data products at a point in the mission defined by the instrument team. Individual data products may have different version numbers, representing different versions of analysis software and calibration, yet have a common release number.

Time Conversion and splitting data files:

The filenames for Level 0 PTP files use the mission elapsed day within the filename. The files are generated to match the UTC day as closely as possible; however, there will be some discrepancies. In generating higher level data products, the actual UTC should be found from the contents of the CCSDS telemetry packets and should be used to generate the correct filename for that packet.

Parsing Filenames:

Filenames can be parsed by first breaking the filename down into the various fields, and then decoding them. As all fields are required, the extraction of fields is a trivial case of string tokenization. In C this can be done using the “strtok” function, in IDL by using “strpos” and in shell scripts by using simple pattern expansion operators.

Filename Ordering:

Release numbers, version, and sub-version numbers do not have leading zeros; therefore, a simple alphanumeric sort will not necessarily return the file names in the ascending version order, e.g. “V1.9.1” will precede “V.1.10.1” in a file listing. To avoid this problem filenames should be sorted by parsing the filename. This can be accomplished under UNIX in the form of shell scripts using a combination of the “find” command and the “sort” command:

```
find . -name “rbsp*.cdf” | sort -t ‘.’ -kA,Bn -kC,Dn
```

Compression:

For efficiency, RBSP CDF files will use the built-in compression capability of the CDF file format. It is strongly suggested that time variables are NOT compressed to allow for quick time based searching of data. CSV files are compressed using GZIP.

5.2 RBSPICE SPECIFIC FILE NAME CONVENTIONS

The following table lists those filename convention specifics as applied to the RBSPICE data.

Table 5-5-1 RBSPICE Specific File Name conventions

Item	RBSPICE Value(s)
<source>	rbsp-a-rbspice rbsp-b-rbspice
<type>	Derived from the RBSPICE Product Directory cal = calibration com = commissioning it = integration and test lev-0 = level 0 lev-1 = level 1 lev-2 = level 2

	lev-3 = level 3 lev-3-pap = Level 3 Pitch Angle and Pressure data files lev-4 = level 4 for release lev-4-m = level 4 not for release ms-3 = mission sim 3 ms-4 = mission sim 4 tel = telemetry
<descriptor>	See directory short names in Table
<date>	yyyymmdd (file boundaries occur at day boundaries)
<version>	vX.Y.Z-rr X = Data Format Version Y = Software Production Version Z = Data Revision Number rr = Data Release Number
<ext>	.cdf = Common Data Format .csv.gz = Comma Separated Value, compressed using GZIP

A sample filename is **rbsp-b-rbspice_lev-1_TOFxPHHHELT_20130512_v1.0.0-00.cdf** which represents level 1 data produced for the time of flight by pulse height proton rates taken at high energy resolution and low time resolution on May 12, 2013. As data is processed and reprocessed the file version numbers will increment appropriately.

5.3 RBSPICE DATA RELEASE PLANS

5.3.1 Publicly Accessible RBSPICE Data

The RBSPICE data is released through the RBSPICE data web sites. There is a specific web site for each spacecraft instrument, i.e. RBSPICEA and RBSPICEB located at: RBSPICEA.FTECS.com and RBSPICEB.FTECS.com.

No security precautions are applied to the publicly released data; it is accessible from generally any web browser as a file listed directory. At the time of writing, the public access data will start at Level 1 data files and will include all data through Level 3 PAP. Some Level 4 data and models will be provided as the RBSPICE team decides to release such data/models for public use.

Level 0 data derived from the original payload telemetry packets will not be released to the general public.

5.3.2 Release of data to NSSDC archive

The National Space Science Data Center (NSSDC) located at Goddard Spaceflight Center (GSFC) will have access to the RBSPICE data through password protected websites. The NSSDC published web sites are currently planned at: RBSPICEA.FTECS.com/NSSDC and RBSPICEB.FTECS.com/NSSDC and will provide access to the Level 0 data files as well as all publicly accessible data files.

5.3.3 Web Services Access

A web services interface is currently planned to be built for access to the RBSPICE data files accessible to the general public. At the time of this writing, the web services interface is in concept and has not fully been designed. As time becomes available after primary development activities and mission simulations, the design of the web services interface will begin with full release documentation to be incorporated into this document. It is conceivable that password protected access to other areas of the data files will become available thru this interface so that organizations such as the NSSDC can have more programmatic access to the RBSPICE data thru the interface.

6 RBSPICE DATA PRODUCT FIELD DESCRIPTIONS

The following tables provide file field descriptions for each RBSPICE Level 1 and Level 2 data product, in both CDF and CSV formats:

6.1 RBSPICE LEVEL 1 PRODUCT FIELD DESCRIPTIONS

Table 6.1-1 EBR_L1 Product Field Descriptions

EBR_L1								
Product Specification								
Product Type	EBR							
Product Description	RBSPICE Electron Basic Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$cd\$-rbspice_lev-1_EBR_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array	Name (CDF)	CDF Array	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
EBR_T	6	EBR	6	Double	0	6000000.0	EarthRadii	
EBR T Error	6	EBR Error	6	Double	0	100.0	None	

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.1-2 ESR_HELT_L1 Product Field Descriptions

ESR_HELT_L1								
Product Specification								
Product Type	ESRHELT							
Product Description	RBSPICE High Energy Res Low Time Res Electron Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_ESRHELT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	TRUE	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	64	T0_Rates	6, 64	Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T1_R	64	T1_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T2_R	64	T2_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T3_R	64	T3_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T4_R	64	T4_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T5_R	64	T5_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T0_R_Error	64	T0_Rate_Errors	6, 64	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	64	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	64	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	64	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	64	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	64	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.1-3 ESR_LEHT_L1 Product Field Descriptions

ESR_LEHT_L1								
Product Specification								
Product Type	ESRLEHT							
Product Description	RBSPICE Low Energy Res High Time Res Electron Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_ESRLEHT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	TRUE	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	14	T0_Rates	6, 14	Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T1_R	14	T1_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T2_R	14	T2_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T3_R	14	T3_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T4_R	14	T4_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T5_R	14	T5_Rates		Double	0	6000000.0	CPS	The rate for electrons observed during the accumulation, in units of counts per second
T0_R_Error	14	T0_Rate_Errors	6, 14	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	14	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	14	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	14	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	14	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	14	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.1-4 IBR_L1 Product Field Descriptions

IBR_L1								
Product Specification								
Product Type		IBR						
Product Description		RBSPICE Ion Basic Rates						
NASA Data Level		1						
File Specification								
File RegEx		rbsp-\$scl\$-rbspice_lev-1_IBR_YYYYMMDD_x.y.z-r.csv.gz						
File Length		1 utcdays						
File Type		CSV, CDF						
File Compression		GZIP						
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
IBR_T	6	IBR	6	Double	0	6000000.0	CPS	
IBR_T_Error	6	IBR_Error	6	Double	0	100.0	None	

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.1-5 ISBR_L1 Product Field Descriptions

ISBR_L1								
Product Specification								
Product Type		ISBR						
Product Description		RBSPICE Ion Species Basic Rates						
NASA Data Level		1						
File Specification								
File RegEx		rbsp-\$scl\$-rbspice_lev-1_ISBR_YYYYMMDD_x.y.z-r.csv.gz						
File Length		1 utcday						
File Type		CSV, CDF						
File Compression		GZIP						
Field Information								
	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
ISR_T	6	ISR	6	Double	0	6000000.0	CPS	
ISR_T_Error	6	ISR_Error	6	Double	0	100.0	None	

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.1-6 ISR_HELT_L1 Product Field Descriptions

ISR_HELT_L1								
Product Specification								
Product Type	ISRHELT							
Product Description	RBSPICE High Energy Res Low Time Res Ion Energy Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_ISRHELT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min*	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	64	T0_Rates	6, 64	Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T1_R	64	T1_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T2_R	64	T2_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T3_R	64	T3_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T4_R	64	T4_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T5_R	64	T5_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T0_R_Error	64	T0_Rate_Errors	6, 64	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	64	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	64	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	64	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	64	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	64	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.1-7 TOFxE_H_L1 Product Field Descriptions

TOFxE_H_L1								
Product Specification								
Product Type	TOFxEH							
Product Description	RBSPICE High Energy Res Low time Res TOFxE Proton Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_TOFxEH_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min*	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	14	T0_Rates	6, 14	Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T1_R	14	T1_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T2_R	14	T2_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T3_R	14	T3_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T4_R	14	T4_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T5_R	14	T5_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T0_R_Error	14	T0_Rate_Errors	6, 14	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	14	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	14	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	14	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	14	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	14	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.1-8 TOFxE_Ion_L1 Product Field Descriptions

TOFxE_Ion_L1								
Product Specification								
Product Type	TOFxEIon							
Product Description	RBSPICE High Energy Res Low Time Res TOFxE Ion Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_TOFxEIon_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min*	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	64	T0_Rates	6, 64	Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T1_R	64	T1_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T2_R	64	T2_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T3_R	64	T3_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T4_R	64	T4_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T5_R	64	T5_Rates		Double	0	6000000.0	CPS	The rate for ions observed during the accumulation, in units of counts per second
T0_R_Error	64	T0_Rate_Errors	6, 64	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	64	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	64	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	64	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	64	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	64	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.1-9 TOFxE_nonH_L1 Product Field Descriptions

TOFxE_nonH_L1								
Product Specification								
Product Type	TOFxEonH							
Product Description	RBSPICE High Energy Res Low Time Res TOFxE non Proton Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_TOFxEonH_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min*	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	20	T0_Rates	6, 20	Double	0	6000000.0	CPS	The rate for non-protons observed during the accumulation, in units of counts per second
T1_R	20	T1_Rates		Double	0	6000000.0	CPS	The rate for non-protons observed during the accumulation, in units of counts per second
T2_R	20	T2_Rates		Double	0	6000000.0	CPS	The rate for non-protons observed during the accumulation, in units of counts per second
T3_R	20	T3_Rates		Double	0	6000000.0	CPS	The rate for non-protons observed during the accumulation, in units of counts per second
T4_R	20	T4_Rates		Double	0	6000000.0	CPS	The rate for non-protons observed during the accumulation, in units of counts per second
T5_R	20	T5_Rates		Double	0	6000000.0	CPS	The rate for non-protons observed during the accumulation, in units of counts per second
T0_R_Error	20	T0_Rate_Errors	6, 20	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	20	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	20	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	20	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	20	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	20	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
* Null value: for CSV file = blank field; for CDF file = -1 x 10 ³¹								

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.1-10 TOFxPH_H_HELT_L1 Product Field Descriptions

TOFxPH_H_HELT_L1								
Product Specification								
Product Type	TOFxPHHELT							
Product Description	RBSPICE High Energy Res Low Time Res TOFxPH Proton Rates							
NASA Data Level	1							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-1_TOFxPHHELT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min*	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	32	T0_Rates	6, 32	Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T1_R	32	T1_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T2_R	32	T2_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T3_R	32	T3_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T4_R	32	T4_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T5_R	32	T5_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T0_R_Error	32	T0_Rate_Errors	6, 32	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	32	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	32	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	32	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	32	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	32	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.1-11 TOF_xPH H LEHT L1 Product Field Descriptions

TOFxpH_H_LEHT_L1								
Product Specification								
Product Type	TOFxpHLEHT							
Product Description	RBSPICE Low Energy Res High Time Res TOFxpH Proton Rates							
NASA Data Level	1							
File Specification								
File RegEx	rb\$-s\$cl\$-rbspice_lev-1_TOFxpHLEHT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min*	inclusive_max*	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
LargePixel		LargePixel		Bool	false	true	None	The energy bin pixel (small or large) corresponds to a geometric factor used in the formula for converting rates into particle intensities
T0_R	10	T0_Rates	6, 10	Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T1_R	10	T1_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T2_R	10	T2_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T3_R	10	T3_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T4_R	10	T4_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T5_R	10	T5_Rates		Double	0	6000000.0	CPS	The rate for protons observed during the accumulation, in units of counts per second
T0_R_Error	10	T0_Rate_Errors	6, 10	Double	0	6000000.0	None	The statistical percent error of the counting
T1_R_Error	10	T1_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T2_R_Error	10	T2_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T3_R_Error	10	T3_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T4_R_Error	10	T4_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
T5_R_Error	10	T5_Rate_Errors		Double	0	6000000.0	None	The statistical percent error of the counting
* Null value: for CSV file = blank field; for CDF file = -1 x 10 ⁻³¹								

6.2 RBSPICE LEVEL 2 PRODUCT FIELD DESCRIPTIONS

Table 6.2-1 ESR_HELT_L2 Product Field Descriptions

ESR_HELT_L2								
Product Specification								
Product Type	ESRHELT							
Product Description	RBSPICE High Energy Res Low Time Res Electron Rates							
NASA Data Level	2							
File Specification								
File RegEx	rbasp-\$scl\$-rbspice_lev-2_ESRHELT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	the midpoint of the accumulation in Earth Radii
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	the spacecraft at the midpoint of the accumulation
FEDU0	64	FEDU	6, 64	Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU1	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU2	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU3	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU4	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU5	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU0_Error	64	FEDU_Error	6, 64	Double	0	100.0	None	The statistical percent error of the counting
FEDU1_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FEDU2_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FEDU3_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FEDU4_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FEDU5_Error	64			Double	0	100.0	None	The statistical percent error of the counting

Table 6.2-1 ESR_HELT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FEDU0_CrossCalib_RMSE	64	FEDU_CrossCalib_RMSE	6, 64	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU1_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU2_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU3_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU4_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU5_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU0_En	64	FEDU_Energy	6, 64	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU1_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU2_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU3_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU4_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU5_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU0_EnRange	64	FEDU_EnergyRange	6, 64	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU1_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU2_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU3_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU4_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU5_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU0_Quality	64	FEDU_Quality	6, 64	Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU1_Quality	64			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU2_Quality	64			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU3_Quality	64			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU4_Quality	64			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU5_Quality	64			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1 x 10⁻³¹

Table 6.2-2 ESR_LEHT_L2 Product Field Descriptions

ESR_LEHT_L2								
Product Specification								
Product Type	ESRLEHT							
Product Description	RBSPICE Low Energy Res High Time Res Electron Rates							
NASA Data Level	2							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-2_ESRLEHT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
	CSV Array Size		CDF Array Size					
Name (CSV)		Name (CDF)		Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the
FEDU0	64	FEDU	6, 64	Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU1	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU2	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU3	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU4	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU5	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential electron flux (intensity) observed during the accumulation
FEDU0_Error	14	FEDU_Error	6, 14	Double	0	100.0	None	The statistical percent error of the counting
FEDU1_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FEDU2_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FEDU3_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FEDU4_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FEDU5_Error	14			Double	0	100.0	None	The statistical percent error of the counting

Table 6.2-2 ESR_LEHT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FEDU0_CrossCalib_RMSE	14	FEDU_CrossCalib_RMSE	6, 14	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU1_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU2_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU3_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU4_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU5_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FEDU0_En	14	FEDU_Energy	6, 14	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU1_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU2_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU3_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU4_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU5_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FEDU0_EnRange	14	FEDU_EnergyRange	6, 14	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU1_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU2_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU3_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU4_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU5_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FEDU0_Quality	14	FEDU_Quality	6, 14	Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU1_Quality	14			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU2_Quality	14			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU3_Quality	14			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU4_Quality	14			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FEDU5_Quality	14			Int16	0	10	None	The electron data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.2-3 ISR_HELT_L2 Product Field Descriptions

ISR_HELT_L2								
Product Specification								
Product Type		ISRHELT						
Product Description		RBSPICE High Energy Res Low Time Res Ion Energy Rates						
NASA Data Level		2						
File Specification								
File RegEx		rbsp-\$cdl\$-rbspice_lev-2_ISRHELT_YYYYMMDD_x.y.z-r.csv.gz						
File Length		1 utcdays						
File Type		CSV, CDF						
File Compression		GZIP						
Field Information								
	CSV Array Size		CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	
Name (CSV)		Name (CDF)						Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in Earth
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the
FIDU0	64	FIDU	6, 64	Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU1	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU2	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU3	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU4	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU5	64			Double	-1	6000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU0_Error	64	FIDU_Error	6, 64	Double	0	100.0	None	The statistical percent error of the counting
FIDU1_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU2_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU3_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU4_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU5_Error	64			Double	0	100.0	None	The statistical percent error of the counting

Table 6.2-3 ISR_HELT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FIDU0_CrossCalib_RMSE	64	FIDU_CrossCalib_RMSE	6, 64	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU1_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU2_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU3_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU4_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU5_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU0_En	64	FIDU_Energy	6, 64	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU1_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU2_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU3_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU4_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU5_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU0_EnRange	64	FIDU_EnergyRange	6, 64	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU1_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU2_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU3_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU4_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU5_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU0_Quality	64	FIDU_Quality	6, 64	Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU1_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU2_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU3_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU4_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU5_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.2-4 TOFxE_H_L2 Product Field Descriptions

TOFxE_H_L2								
Product Specification								
Product Type	TOFxEH							
Product Description	RBSPICE High Energy Res Low time Res TOFxE Proton Rates							
NASA Data Level	2							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-2_TOFxEH_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdy							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in Earth
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the
FPDU0	14	FPDU	6, 14	Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU1	14			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU2	14			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU3	14			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU4	14			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU5	14			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU0_Error	14	FPDU_Error	6, 14	Double	0	100.0	None	The statistical percent error of the counting
FPDU1_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FPDU2_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FPDU3_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FPDU4_Error	14			Double	0	100.0	None	The statistical percent error of the counting
FPDU5_Error	14			Double	0	100.0	None	The statistical percent error of the counting

Table 6.2-4 TOFxE_H_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FPDU0_CrossCalib_RMSE	14	FPDU_CrossCalib_RMSE	6, 14	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU1_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU2_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU3_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU4_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU5_CrossCalib_RMSE	14			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU0_En	14	FPDU_Energy	6, 14	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU1_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU2_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU3_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU4_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU5_En	14			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU0_EnRange	14	FPDU_EnergyRange	6, 14	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU1_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU2_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU3_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU4_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU5_EnRange	14			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU0_Quality	14	FPDU_Quality	6, 14	Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU1_Quality	14			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU2_Quality	14			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU3_Quality	14			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU4_Quality	14			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU5_Quality	14			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.2-5 TOFxE_Ion_L2 Product Field Descriptions

TOFxE_Ion_L2								
Product Specification								
Product Type	TOFxEIon							
Product Description	RBSPICE High Energy Res Low Time Res TOFxE Ion Rates							
NASA Data Level	2							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-2_TOFxEIon_YYYYMMDD							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in Earth
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the
FIDU0	64	FIDU	6, 64	Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU1	64			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU2	64			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU3	64			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU4	64			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU5	64			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential ion flux (intensity) observed during the accumulation
FIDU0_Error	64	FIDU_Error	6, 64	Double	0	100.0	None	The statistical percent error of the counting
FIDU1_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU2_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU3_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU4_Error	64			Double	0	100.0	None	The statistical percent error of the counting
FIDU5_Error	64			Double	0	100.0	None	The statistical percent error of the counting

Table 6.2-5 TOFxE_Ion_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FIDU0_CrossCalib_RMSE	64	FIDU_CrossCalib_RMSE	6, 64	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU1_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU2_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU3_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU4_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU5_CrossCalib_RMSE	64			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FIDU0_En	64	FIDU_Energy	6, 64	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU1_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU2_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU3_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU4_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU5_En	64			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FIDU0_EnRange	64	FIDU_EnergyRange	6, 64	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU1_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU2_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU3_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU4_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU5_EnRange	64			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FIDU0_Quality	64	FIDU_Quality	6, 64	Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU1_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU2_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU3_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU4_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FIDU5_Quality	64			Int16	0	10	None	The ion data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.2-6 TOFxE_nonH_L2 Product Field Descriptions

TOFxE_nonH_L2								
Product Specification								
Product Type	TOFxEonH							
Product Description	RBSPICE High Energy Res Low Time Res TOFxE non Proton Intensities							
NASA Data Level	2							
File Specification								
File RegEx	rbsp-\$scl\$-rbspice_lev-2_TOFxEonH_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in Earth
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the
FHeDU0	20	FHeDU	6, 20	Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential helium flux (intensity) observed during the accumulation
FHeDU1	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential helium flux (intensity) observed during the accumulation
FHeDU2	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential helium flux (intensity) observed during the accumulation
FHeDU3	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential helium flux (intensity) observed during the accumulation
FHeDU4	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential helium flux (intensity) observed during the accumulation
FHeDU5	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential helium flux (intensity) observed during the accumulation
FHeDU0_Error	20	FHeDU_Error	6, 20	Double	0	100.0	None	The statistical percent error of the counting
FHeDU1_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FHeDU2_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FHeDU3_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FHeDU4_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FHeDU5_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FHeDU0_CrossCalib_RMSE	20	FHeDU_CrossCalib_RMSE	6, 20	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FHeDU1_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FHeDU2_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FHeDU3_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FHeDU4_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FHeDU5_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished

Table 6.2-6 TOFxE_nonH_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FHeDU0_En	20	FHeDU_Energy	6, 20	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FHeDU1_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FHeDU2_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FHeDU3_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FHeDU4_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FHeDU5_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FHeDU0_EnRange	20	FHeDU_EnergyRange	6, 20	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FHeDU1_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FHeDU2_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FHeDU3_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FHeDU4_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FHeDU5_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FHeDU0_Quality	20	FHeDU_Quality	6, 20	Int16	0	10	None	The helium data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FHeDU1_Quality	20			Int16	0	10	None	The helium data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FHeDU2_Quality	20			Int16	0	10	None	The helium data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FHeDU3_Quality	20			Int16	0	10	None	The helium data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FHeDU4_Quality	20			Int16	0	10	None	The helium data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FHeDU5_Quality	20			Int16	0	10	None	The helium data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU0	20	FODU	6, 20	Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU1	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU2	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU3	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU4	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU5	20			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation

Table 6.2-6 TOFxE_nonH_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FODU0_Error	20	FODU_Error	6, 20	Double	0	100.0	None	The statistical percent error of the counting
FODU1_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FODU2_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FODU3_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FODU4_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FODU5_Error	20			Double	0	100.0	None	The statistical percent error of the counting
FODU0_CrossCalib_RMSE	20	FODU_CrossCalib_RMSE	6, 20	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU1_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU2_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU3_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU4_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU5_CrossCalib_RMSE	20			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU0_En	20	FODU_Energy	6, 20	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU1_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU2_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU3_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU4_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU5_En	20			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU0_EnRange	20	FODU_EnergyRange	6, 20	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU1_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU2_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU3_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU4_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU5_EnRange	20			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU0_Quality	20	FODU_Quality	6, 20	Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU1_Quality	20			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU2_Quality	20			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU3_Quality	20			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU4_Quality	20			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU5_Quality	20			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1×10^{-31}

Table 6.2-7 TOF_xPH_H_HELT_L2 Product Field Descriptions

TOF _x PH_H_HELT_L2								
Product Specification								
Product Type		TOF _x PHHHELT						
Product Description		RBSPICE High Energy Res Low Time Res TOF _x PH Proton Rates						
NASA Data Level		2						
File Specification								
File RegEx		rbsp-\$scl\$-rbspice_lev-2_TOF _x PHHHELT_YYYYMMDD_x.y.z-r.csv.gz						
File Length		1 utcdays						
File Type		CSV, CDF						
File Compression		GZIP						
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in Earth Radii
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the accumulation
FPDU0	32	FPDU	6, 32	Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU1	32			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU2	32			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU3	32			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU4	32			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU5	32			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU0_Error	32	FPDU_Error	6, 32	Double	0	100.0	None	The statistical percent error of the counting
FPDU1_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FPDU2_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FPDU3_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FPDU4_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FPDU5_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FPDU0_CrossCalib_RMSE	32	FPDU_Crosscalib_RMSE	6, 32	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU1_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU2_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU3_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU4_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU5_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished

Table 6.2-7 TOF_xPH_H_HELT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FPDU0_En	32	FPDU_Energy	6, 32	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU1_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU2_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU3_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU4_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU5_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU0_EnRange	32	FPDU_EnergyRange	6, 32	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU1_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU2_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU3_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU4_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU5_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU0_Quality	32	FPDU_Quality	6, 32	Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU1_Quality	32			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU2_Quality	32			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU3_Quality	32			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU4_Quality	32			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU5_Quality	32			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU0	32	FODU	6, 32	Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU1	32			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU2	32			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU3	32			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU4	32			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU5	32			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU0_Error	32	FODU_Error	6, 32	Double	0	100.0	None	The statistical percent error of the counting
FODU1_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FODU2_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FODU3_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FODU4_Error	32			Double	0	100.0	None	The statistical percent error of the counting
FODU5_Error	32			Double	0	100.0	None	The statistical percent error of the counting

Table 6.2-7 TOF_xPH_H_HELT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FODU0_CrossCalib_RMSE	32	FODU_Crosscalib_RMSE	6, 32	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU1_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU2_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU3_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU4_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU5_CrossCalib_RMSE	32			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU0_En	32	FODU_Energy	6, 32	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU1_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU2_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU3_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU4_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU5_En	32			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU0_EnRange	32	FODU_EnergyRange	6, 32	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU1_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU2_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU3_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU4_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU5_EnRange	32			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FODU0_Quality	32	FODU_Quality	6, 32	Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU1_Quality	32			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU2_Quality	32			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU3_Quality	32			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU4_Quality	32			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU5_Quality	32			Int16	0	10	None	The oxygen data quality flag currently set to 10 (unknown) until the data sets are fully vetted

* Null value: for CSV file = blank field; for CDF file = -1×10^{31}

<http://rbspice.ftecs.com/Data.html>

Table 6.2-8 TOFxPH_H_LEHT_L2 Product Field Descriptions

TOFAPH_H_LEHT_L2								
Product Specification								
Product Type	TOFAPHHLEHT							
Product Description	RBSPICE Low Energy Res High Time Res TOFAPH Proton Rates							
NASA Data Level	2							
File Specification								
File RegEx	rbsp-\$cd\$-rbspice_lev-2_TOFAPHHLEHT_YYYYMMDD_x.y.z-r.csv.gz							
File Length	1 utcdays							
File Type	CSV, CDF							
File Compression	GZIP							
Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
		Epoch		TT2000 CDF variable	2010-01-01T00:00:00.0	2024-12-31T23:59:59.0	Milliseconds	J2000 epoch time at the beginning of the accumulation
UTC		UTC		String			Seconds	UTC time stamp as a string for the beginning of the measurement
SCLOCK_FULL		SCLOCK_FULL		String			Ticks	Spacecraft Clock as a string for the beginning of the measurement
OrbitNumber		OrbitNumber		Int32	-1	5000	None	Orbit number as an integer for the beginning of the measurement
ET		ET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time for the beginning of the measurement
MidET		MidET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the midpoint of the measurement
StopET		StopET		Double	315576066.183925	788961666.183928	Seconds	J2000 epoch based ephemeris time at the end of the measurement
Duration		Duration		Double	0.0	999999.999	Seconds	Real variable representing the number of seconds that of the accumulation subtracting out any instrument dead time
Spin		Spin		UInt32	0	65535	None	Integer spin number for the beginning of the accumulation
Sector		Sector		UInt32	0	255	None	Integer sector number for the beginning of the accumulation (Each spin is divided into 36 sectors although accumulation does occur across multiple sectors)
L		L		Real	0.0	10.0	EarthRadii	McElwain Dipole L value for the SC position at the midpoint of the accumulation in Earth Radii
SM	3	Position_SM		Real	-10.0	10.0	EarthRadii	X, Y, Z values in Earth Radii of the position of the spacecraft at the midpoint of the accumulation
FPDU0	10	FPDU	6, 10	Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU1	10			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU2	10			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU3	10			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU4	10			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU5	10			Double	-1	6000000000000.0	Counts/(sec*cm^2*sr*MeV)	The differential proton flux (intensity) observed during the accumulation
FPDU0_Error	10	FPDU_Error	6, 10	Double	0	100.0	None	The statistical percent error of the counting
FPDU1_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FPDU2_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FPDU3_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FPDU4_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FPDU5_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FPDU0_Crosscalib_RMSE	10	FPDU_Crosscalib_RMSE	6, 10	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU1_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU2_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU3_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU4_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FPDU5_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished

Table 6.2-8 TOF_xPH_H_LEHT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description
FPDU0_En	10	FPDU_Energy	6, 10	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU1_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU2_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU3_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU4_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU5_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FPDU0_EnRange	10	FPDU_EnergyRange	6, 10	Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU1_EnRange	10			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU2_EnRange	10			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU3_EnRange	10			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU4_EnRange	10			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU5_EnRange	10			Double	-1	15000.0	keV	The low and high energy values of the energy channel (not the deltas)
FPDU0_Quality	10	FPDU_Quality	6, 10	Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU1_Quality	10			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU2_Quality	10			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU3_Quality	10			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU4_Quality	10			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FPDU5_Quality	10			Int16	0	10	None	The proton data quality flag currently set to 10 (unknown) until the data sets are fully vetted
FODU0	10	FODU	6, 10	Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU1	10			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU2	10			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU3	10			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU4	10			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU5	10			Double	-1	6000000000000.0	Counts/(sec*cm ² *sr*MeV)	The differential oxygen flux (intensity) observed during the accumulation
FODU0_Error	10	FODU_Error	6, 10	Double	0	100.0	None	The statistical percent error of the counting
FODU1_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FODU2_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FODU3_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FODU4_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FODU5_Error	10			Double	0	100.0	None	The statistical percent error of the counting
FODU0_Crosscalib_RMSE	10	FODU_Crosscalib_RMSE	6, 10	Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU1_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU2_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU3_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU4_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU5_Crosscalib_RMSE	10			Double	0.0	3000000.0	None	Currently this variable is empty awaiting cross calibration model science to be finished
FODU0_En	10	FODU_Energy	6, 10	Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU1_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU2_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU3_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU4_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel
FODU5_En	10			Double	-1	15000.0	keV	The midpoint energy of each energy channel

Table 6.2-8 TOF_xPH_H_LEHT_L2 Product Field Descriptions (cont.)

Field Information								
Name (CSV)	CSV Array Size	Name (CDF)	CDF Array Size	Type	inclusive_min *	inclusive_max *	Units	Description

7 REFERENCES

Appendix A - Q&A

Q: What does "TOF_x" stand for? Through http://athena.jhuapl.edu/data_finder I found TOF_xEH, TOF_xEIon, TOF_xEnonH, TOF_xPHHHELT, and TOF_xPHHLEHT for RBSP-B, but did not find the "TOF_x"s for RBSP-A. Will they ever be posted?

A: TOF_x stands for Time of Flight by ..., the ... is either Energy or Pulse Height so we have TOF_xE or TOF_xPH data products. This product designation has to do with the mode in which we are taking the data and whether there is enough energy to trigger the SSD portion of the instrument. In general the TOF_xE products calculate the total energy using the time of flight and then utilize the SSD energy deposition to further clarify the species. The TOF_xPH products calculate the total energy using the time of flight and then utilize the pulse height to identify the species since the energy of the species is not enough to penetrate into the SSD. The alternative counting data product that we have is the ESRHELT, ESRLEHT, and ISRHELT products in which these products are taken only using the "energy" mode of the RBSPICE instrument. That means that we have no understanding of the species of the particle (barring electron versus ion). ESR products stand for Electron Species products and ISR stand for Ion Species. In everything, the HELT stands for High Energy Low Time resolution and the LEHT stands for Low Energy High Time resolution. Unfortunately during January 17, the RBSPICE A instrument was not programmed to produce any of the TOF_x data products. This capability was turned off due to some instrument issues observed in early November 2012 and then once they were resolved it was turned back on January 26, 2013. The RBSPICE B instrument was fully operational during the time frame that you are looking at. I point you to our production report pages at http://rbspicea.ftecs.com/RBSPICEA_Production_Status_Report.htm (click on the counting tab at the bottom) and http://rbspiceb.ftecs.com/RBSPICEB_Production_Status_Report.htm to see what counting data products are available for the mission.

Q: I found H fluxes in TOF_xEH, He and O fluxes in TOF_xEnonH, H and O fluxes in TOF_xPHHHELT and TOF_xPHHLEHT. Which file(s) should I use to get the fluxes? Are they all sector (not spin-averaged) data?

A: In regards to which files to use first understand that the Level 0 files are counts, the Level 1 files are rate, and the Level 2 files are intensity (differential flux) (units of counts/(MeV*cm²*sr*sec). In regards to density you need to combine all of the particle data from each of the products which contain the species for which you are interested. For instance, if you want the density of oxygen ions (note that we don't have anything that separates O⁺, O⁺⁺, etc) then you need to work with the TOF_xEnonH and one of TOF_xPHHLEHT or TOF_xPHHHELT. The decision on which of the TOF_xPH products

<http://rbspice.ftecs.com/Data.html>

to use is based upon what time resolution you want to work with in regards to your production of the densities. As a note, the TOFEnonH oxygen energy starts around 123KeV and the TOFPHHHELT ends around 177 KeV so there are measurements that overlap between the two products. The overlap is there to help us make sure that our calibration is working correctly and to provide the option on which products we use in regards to the how we calculate the macro properties like density. You need to make sure that you are not combining all of the data from all of the channels though because you would then over calculate the densities at certain energies.

I would also discourage you from using the very bottom energy channels of any of the data products since they have a tendency to be contaminated.

None of the data are Spin Averaged from a traditional sense of higher level data products.

Instead the accumulation periods vary from product to product. To start off, the RBSPICE instrument breaks a spin into 36 sectors and the accumulation period of the products is individually defined so that some products accumulate in very high time resolution and others accumulate in low time resolution and some in a somewhat medium time resolution.

The TOFEnonH data product have 20 energy channels and are accumulated over a single spin but the number of sectors of the accumulation can vary over the mission. You can look at the data files to determine how many sectors are included in the accumulation by the sector cadence within any spin, i.e. in 2012 for spin= 64424 the sector numbers step as 0, 2, 4, 6, i.e. accumulating over 2 sectors for each data point.

The TOFPHHLEHT data product are also accumulated in a single spin with generally a higher angular resolution compared to the TOFEnonH data products but the energy resolution is limited to 10 energy channels and only 3 or 4 are oxygen.

The TOFPHHHELT data product has 32 energy channels 11 of which are counting oxygen ions but the product itself is accumulated over multiple spins for each of the sector groups that are involved in the accumulation. To be more specific, the accumulation breaks a spin into X number of larger “sectors” and each “sector” is then accumulated over 10 spins.

For instance, during much of the mission (maybe all of it) the spin is divided into 9 larger “sectors” each accumulated over 10 spins.

By looking at the sector cadence within a file and the spin cadence you can tell how many sectors are included in a larger “sector” and how many spins are included in the accumulation.

If you want a spin averaged data product then you will need to add all of the data from each sector group within a spin and then you will have the spin averaged data.

Q: What are the energy channels? What is the y-axis plotted with Autoplot? What operations (slice, collapse, etc) should be applied to the data to get the fluxes and further calculate the densities?

A: This is a much harder question to answer but I will attempt it.

First I would like to encourage you to utilize the MIDL analysis package that is available at the following URL: <http://sd-www.jhuapl.edu/rbspice/MIDL/>

This analysis package already understands how to plot the RBSPICE data and I think would be very useful to you to better have access and understand our data.

The energy channels can be found at the following URL: <http://rbspice.ftecs.com/Data.html> --- scroll down to the bottom to get to links for the A/B calibration pages.

In regards to plotting of the y axis for autoplot, that depends upon what you are plotting and trying to accomplish.

The x axis is most likely time and for a spectrograph the y axis is energy and the z axis is intensity/rate/count (depending upon what data level you are using).

Obviously once you calculate the density of the data then the y axis is just the density and x the time.

Appendix B - Glossary